




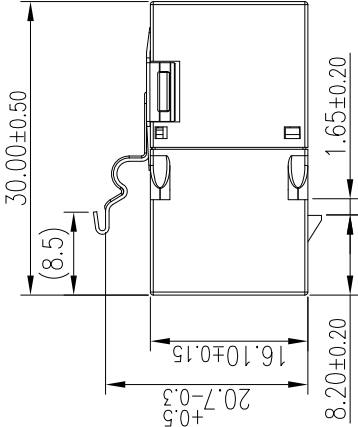




|  |   |  |   |  |   |
|--|---|--|---|--|---|
| 1  | 2 | 3  | 4 | 5  | 6 |
| <div>Specification</div> <div>Qualified Screened Class E<sub>A</sub>/Category 6A<br/>Permanent Link/Channel of ANSI/TIA-568-C.2<br/>IEC 60603-7-3<br/>CHNELEC EN 50173-1</div>   |   | <div>Mechanical</div> <div>Plug Insertion Life: 750 Cycles Minimum<br/>Plug &amp; Jack Contact Force: 100 Grams Minimum<br/>Using FCC-Approved Plug<br/>Plug Retention Force: 30 lbs Minimum<br/>Temperature: -40° to 150°F (-40° to 68°C)</div>                 |   | <div>Physicals</div> <div>Housing: die casting, alloy 3<br/>Bracket:0.35t SUS 304<br/>PCB: FR4, 1.0mm Thickness<br/>Jack wire: phosphor bronze gold over nickel plated</div> |   |
| <div>Electrical</div> <div>Current Rating: 1.5 Amps<br/>Insulation Resistance: 500 Mohms Minimum<br/>Contact Resistance: 20 mohms Maximum<br/>DC Resistance: 0.1 ohms Maximum<br/>Dielectric Withstanding Voltage:1000VAC RMS @ 60Hz/1min</div>                    |   | <div></div> |   |  |   |
| <div></div> |   |  |   |  |   |
| <div></div>   |   |  |   |  |   |
| Date   |   | 2017 / 06 / 22   |   | Title: Keystone Mounting for enclosures  |   |
| Unit   |   | mm   |   | Item no. 86408   |   |
| Projection   |   |   |   | Barcode 4043619864089  |   |
| Rev  |   | A  |   | File No.   |   |
| 1  | 2 | 3  | 4 | 5  | 6 |