
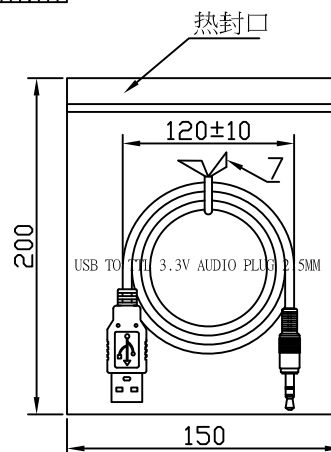
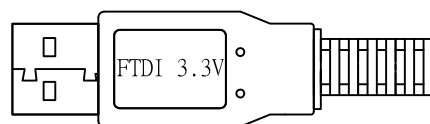


REV	ECRN	DATE
1	NEW PRODUCTION	20150512
2	NEW PRODUCTION	20180314

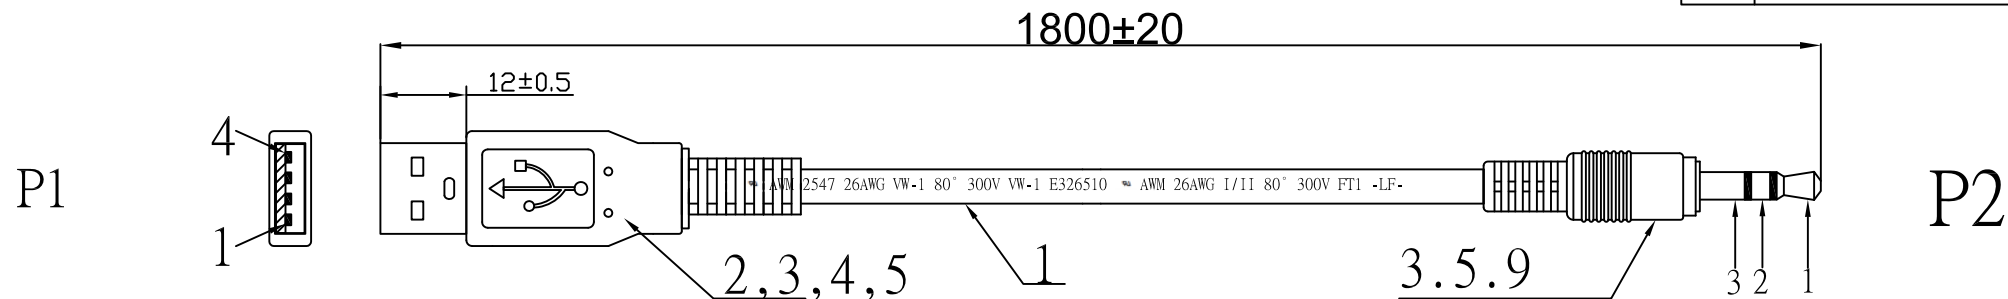


模具编号：P-38

NOTES:

- 1.ELECTRICAL TEST:100%OPEN,SHORT&MIS WIRE TEST.
- 2.CONTACT RESISTANCE:0.5ohm,
- 3.INSULATOR RESISTANCE:5M ohm.
- 4.HIGH VOLTAGE:DC 300V 0.01sec.
- 5.MUST BE ROHS COMPLIANT.


TTL--PCB

TOP



1 2 3

BOTTOM



4 5 6

PIN WIRING

P1	P2
1 RED(VCC 3.3V)	
2 ORANGE	1(TXD)
3 YELLOW	2(RXD)
4 GREEN	
5 BLACK	3(GND)
6 BROWN	

⑨	B.04025M.0N01R	CONNECTOR	AUDIO PLUG 2.5MM*4.5 3-POLE SHELL NICKEL PLATING PLASTIC: BLACK	1	PCS
⑧	I.150200.0308R	PE BAG	200*150*0.04MM PE BAG PRINTED BLACK"USB TO TTL 3.3V AUDIO PLUG 2.5MM	1	PCS
⑦	F.0501B0.0100R	TUBE	φ5.5*20mm HEAT TUBE COLOR BLACK	1	PCS
⑥	I.000001.0400R	TIE	TIE BLACK L=70MM	1	PCS
⑤	C.045P01.0100R	MOLDING	PVC 45P BLACK	12.5	G
④	C.000000.0000R	MOLDING	PE	2.5	G
③	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	3.5	G
②	B.01004M.0N06R	CONNECTOR	TTL-PCB(3.3V) USB A/M CONNECTOR PLASTIC: BLACK	1	PCS
①	A.027X01.0202R	CABLE	UL2547 26AWG(7/0.16TC)*2C+S(44/0.10TC) PVC JACKET COLOR:BLACK OD=3.5±0.1mm L=1780MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q' TY	UNIT

DELICK®
we move the world

Title: Converter USB 2.0 male > TTL 2.5 mm 3 pin stereo jack male 1.8 m (3.3 V)

Date	2018 / 02 / 01	Item no.	83789
Unit	mm	Barcode	4043619837892
Projection		File No.	88203
Rev	A		