

Delock 5G LTE Antenna N jack -2.14 - 2.93 dBi 33.5 cm fixed wall and pole mounting omnidirectional outdoor white

Description

This waterproof antenna by Delock allows the usage of different **5G** and **LTE** bands outdoors. It is completely compatible to GSM, UMTS, 5G LTE, ZigBee, Z-Wave, NB-IoT, WLAN 2.4 GHz, Bluetooth, ISM, DECT and LoRa.

5G mobile radio standard

5G unlike its predecessors LTE (4G) and UMTS (3G) will use more and wider frequency spectrums.

The 5G standard promises more throughput, capacity and low latency.



Item no. 12631

EAN: 4043619126316 Country of origin: Taiwan, Republic of China

Package: Box

Specification

- Connector: 1 x N jack waterproof
- Frequency range:
 - 617 798 MHz
 - 803 960 MHz
 - 1452 1496 MHz
 - 1710 2200 MHz
 - 2300 2690 MHz
 - 3300 3800 MHz
 - 4200 5000 MHz
- Antenna gain: -2.14 2.93 dBi
- Impedance: 50 Ohm
- VSWR: 3.0 5.0
- Polarisation: linear, vertical
- Operating temperature: -40 °C ~ 85 °C
- Housing material: GFRP
- Length: ca. 335 mm



- Diameter: ca. 27 mm
- Weight: ca. 284 g


System requirements

• Device with one free N port

Package content

- Antenna
- Mounting material

Images

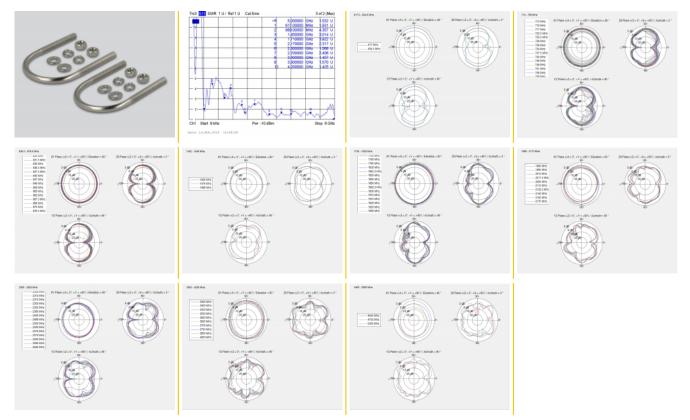

DATASHEET



General

Mounting type:	pole wall
Suitable for indoor:	yes
Suitable for outdoor:	yes

Interface

|--|

Technical characteristics

Frequency range:	1710 - 2200 MHz 617 - 798 MHz 803 - 960 MHz 1452 - 1496 MHz 2300 - 2690 MHz 3300 - 3800 MHz 4200 - 5000 MHz
Antenna gain:	- 2.14 - 2.93 dBi
Beam width horizontal:	360°
Beam width vertical:	17°
Impedance:	50 Ω
Operating temperature:	-40 °C ~ 85 °C
Polarisation:	linear vertical
Power handling:	max. 100 W
VSWR:	3.0 - 5.0

Physical characteristics

Antenna type:	omnidirectional
Housing colour:	white
Housing material:	GFRP



DATASHEET

Weight:	284 g mit Befestigungsmaterial
Diameter:	2.6 cm
Length:	335 mm