


# Delock Riser Card PCI Express x1 > 2 x PCIe x1 with 30 cm USB cable

## Description

The PCI Express riser card by Delock can be plugged into any PCI Express x1 slot on the motherboard. The PCI Express board can be mounted in a different position in the case. This allows up to two PCIe cards to be operated in each PCIe slot of a motherboard.

## Note

The package content includes a USB 3.0 riser cable with a length of 30 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.

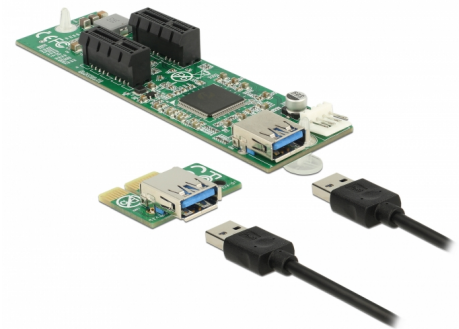

**Item no. 41433**

EAN: 4043619414338

Country of origin: China

Package: Retail Box

## Specification

- Connectors:
  - Motherboard side:
    - 1 x PCI Express x1
    - 1 x USB 3.0 Type-A female
  - Riser side:
    - 2 x PCI Express x1 slot
    - 1 x USB 3.0 Type-A female
    - 1 x Floppy 4 pin power plug
- Chipset: Pericom PI7C9X2G
- Cable data:
  - 1 x riser cable USB 3.0 Type-A male to male ca. 30 cm (incl. connectors)
  - 1 x power cable Floppy to Molex ca. 15 cm (incl. connectors)
- Dimensions of the riser card (LxWxH): ca. 120 x 34 x 15 mm

## System requirements




- Linux Kernel 2.6.38 or above

- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x1 / x4 / x8 / x16 / x32 slot
- Power supply with a free Molex power connector

## Package content

- PCIe to USB riser card
- USB to PCIe riser card
- 1 x USB 3.0 cable
- 1 x Power cable

## Images



## General

Supported operating system:	Linux Kernel 2.6.38 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	--

## Physical characteristics

Length:	120 mm
Width:	34 mm
Height:	15 mm