


Delock Converter SATA Host > 2 x SATA Device with RAID

Description

The Delock SATA RAID converter enables you to build a RAID system with two HDD's, as you connect the 22 pin SATA connector to the primary hard disk and connect the second hard disk to the SATA 7 pin device connector. By the second SATA 7 pin connector you embed the converter in your system.

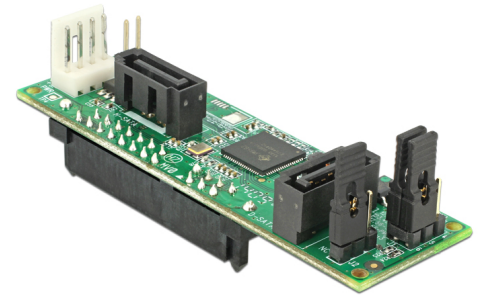

Note

The SMART function is not supported. JBOD is only supported on SATA controllers with port multiplier function.

Item no. 62466

EAN: 4043619624669

Country of origin: Taiwan,
Republic of China

Package: White Box

Specification

- Connector:
 - 1 x SATA 6 Gb/s 22 pin female
 - 2 x SATA 6 Gb/s 7 pin female (1 x host, 1 x device)
 - 1 x 4 pin power connector
 - 1 x LED pin header
 - 2 x jumper for RAID mode
- Chipset: JMS562
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, JBOD, SPAN
- Supports Native Command Queuing (NCQ)
- OS independent, no driver installation necessary

System requirements

- HDD with SATA 22 pin connector
- SATA connecting cable
- Power supply with a free power connector

Package content

- Converter
- Cable SATA 15 pin > 4 pin
- User manual

Images

