

# Delock Adapter DDR3 > SATA 6Gb/s RAID Module - 2 x M.2 NGFF

## Description

This Dual SATA RAID module offers the possibility to connect two M.2 NGFF


Memory flash modules (with SATA I/O) via a free DDR3 slot to work as HDD.

Here you have the option to operate with mirror function (RAID1) or with the

total storage volume (RAID0). Both M.2 slots must be connected for the operation.

The data shall transmitted over the SATA 6 Gb /s cable which must be connected.

The power is supplied via the DDR3 connection.

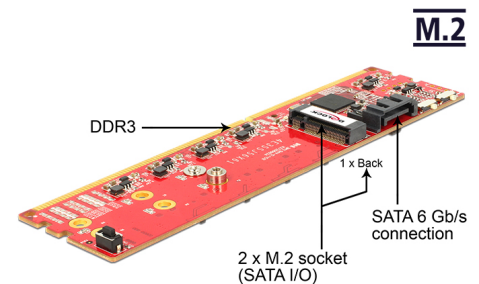

### Item no. 62622

EAN: 4043619626229

Country of origin: Taiwan,  
Republic of China

Package: Box

## Note

The SMART function is not supported. JBOD is only supported on SATA controllers with port multiplier function.

## Specification

- Connector:  
Input: 1 x SATA 6 Gb/s 7 Pin Buchse  
Output: 2 x M.2-B 2242/2260/2280
- Chipset: JMS562
- Form factor: DDR3 240 pin
- Raid: 0, 1 over SATA
- Maximum TDP: 9W (6A x 1,5V)
- Operation temperature: 0 °C ~ 70 °C
- Storage temperature: -55 °C ~ +95 °C
- Vibration: 5G @ 7-2000 Hz

- Shock: 50G @ 0.5 ms
- Dimensions: (LxBxH): 133.3 x 3.,0 x 13.2 mm
- Weight: 22 g

---

## System requirements

- A free DRR3 slot and one SATA 6 Gb/s connector.

---

## Package content

- Dual SATA 6 Gb/s RAID module

---

## Images

