


Delock D-Sub 25 female with insulation displacement 2 pieces

Description

This D-Sub 25 female with insulation displacement by Delock can be used to mount flat cables with 25 pin and a pitch of 1.27 mm. The D-Sub connectors for flat cables are often used e.g. in industry, telecommunications and for hobby applications.

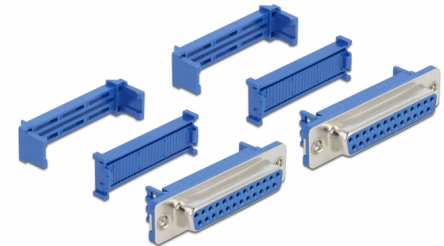

Note

For pressing the flat cable into the insulation displacement, it is recommended to use the Delock installation tool 86469.

Item no. 66597

EAN: 4043619665976

Country of origin: China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x D-Sub 25 female (2 rows) with nuts with insulation displacement
 - 1 x press-in clip
 - 1 x strain relief clip
- Suitable for flat cable with 1.27 mm pitch
- Operating temperature: -40 °C ~ 105 °C
- Colour: blue
- Dimensions (LxWxH): ca. 53.1 x 17.5 x 12.8 mm

System requirements

- A free D-Sub 25 pin male and flat cable 25 pin with 1.27 mm pitch

Package content

- 2 x D-Sub 25 female with insulation displacement

Interface

| | |
|--------------|---|
| Connector 1: | 1 x press-in clip 1 x Sub-D25 female (2 rows) with nuts with insulation displacement 1 x strain relief clip |
|--------------|---|

Technical characteristics

| | |
|------------------------|-----------------|
| Operating temperature: | -40 °C ~ 105 °C |
|------------------------|-----------------|

Physical characteristics

| | |
|-----------------|---------|
| Pitch distance: | 1.27 mm |
| Length: | 53.1 mm |
| Width: | 17.5 mm |
| Height: | 12.8 mm |
| Colour: | blue |