


Delock PCI Express x2 Card > 4 x internal M.2 Key B - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by four M.2 slots. Up to four M.2 SATA modules can be connected in format 2280, 2260, 2242, 2230 with this card.

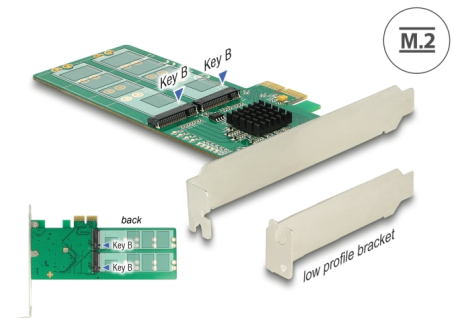

Item no. 89588

EAN: 4043619895885

Country of origin: China

Package: Retail Box

Specification

- Connectors:
internal:
4 x 67 pin M.2 key B slot
1 x PCI Express x2, V2.0
- Interface: SATA
- Chipset: Marvell 88SE9235
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 5 Gb/s
- Supports Native Command Queuing (NCQ)
- LED indicator
- Bootable


System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.3 / Kernel 4.9
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Mounting material
- User manual

Images

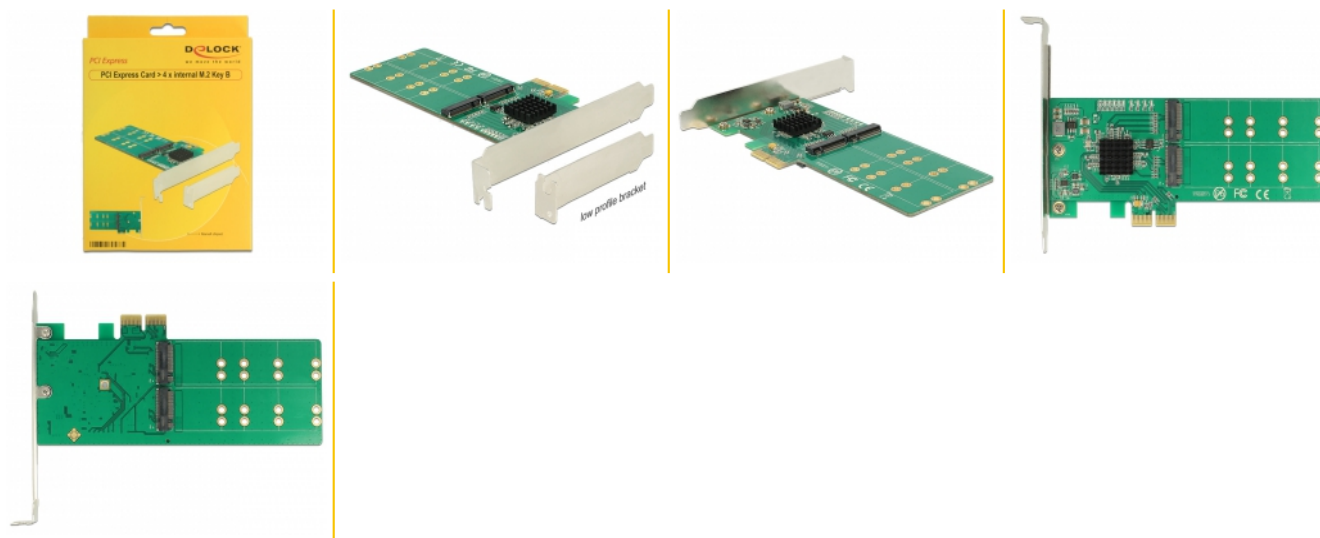

General

| | |
|---|--|
| Supported operating system: | Linux Kernel 3.3 or above Linux Kernel 4.9 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit |
| Slot: | SATA |
| Supported module: | M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported |

Interface

| | |
|-----------|---|
| Internal: | 4 x 67 pin M.2 key B slot 1 x PCI Express x2, V2.0 |
|-----------|---|

Technical characteristics

| | |
|---------------------|------------------|
| Chipset: | Marvell 88SE9235 |
| Data transfer rate: | 5 Gbps |

Physical characteristics

| | |
|---------------|----------------------|
| Slot bracket: | Low Profile standard |
|---------------|----------------------|