


Delock PCI Express x16 (x4 / x8) Card to 1 x NVMe M.2 Key M for Server

Description

This PCI Express card by Delock expands the PC by one M.2 slot. One M.2 module in 2280, 2260, 2242 or 2230 format can be connected. The card can be operated through the notches on an x4, x8 or x16 slot. If the card will be installed in the PC, the slot bracket does not have to be removed. Due to the small height, the card can also fit into for servers with one unit height (1U).

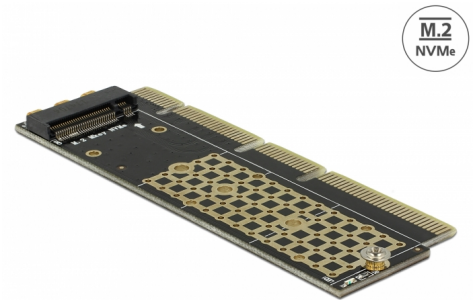

Item no. 90303

EAN: 4043619903030

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - 1 x 67 pin M.2 key M slot
 - 1 x PCI Express x16 (4-Lane), V4.0
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Bootable, ex UEFI version 2.3.1
- Supports NVM Express (NVMe)
- 1 x LED indicator
- Holes in the PCB for cooling the SSD
- Dimensions (LxWxH) without PCIe connector: ca. 90 x 24 x 5 mm


System requirements

- Linux Kernel 3.17 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
 - 1 x fixing screw for M.2 module
 - Screwdriver
 - User manual
-

Images



General

Function:	NVM Express (NVMe)
Supported operating system:	Linux Kernel 3.17 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe

Interface

Internal:	1 x 67 pin M.2 key M slot 1 x PCI Express x4, V4.0 1 x PCI Express x16, V4.0 1 x PCI Express x8, V4.0
-----------	--