


Delock PCI Express x8 Card to 2 x internal NVMe M.2 Key M - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two **M.2** slots. Up to two M.2 SSDs in format 2280, 2260, 2242 and 2230 can be connected.

Delock M.2 PCIe card for gaming and server

Especially in the gaming and server range, this card is ideally suited to expand the existing system by two fast M.2 **NVMe** slots. Both slots can be used simultaneously.

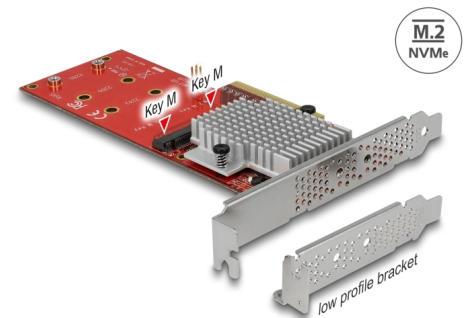

Item no. 90305

EAN: 4043619903054

Country of origin: Taiwan,
Republic of China

Package: White Box

Specification

- Connectors:
internal:
2 x 67 pin M.2 key M slot
1 x PCI Express x8, V3.0
2 x 2 pin pin header for LED
- Chipset: Asmedia ASM2824
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 32 Gbps
- Supports NVM Express (NVMe)
- Bootable


System requirements

- Linux Kernel 3.17 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC with one free PCI Express x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- M.2 mounting material
- User manual

Images

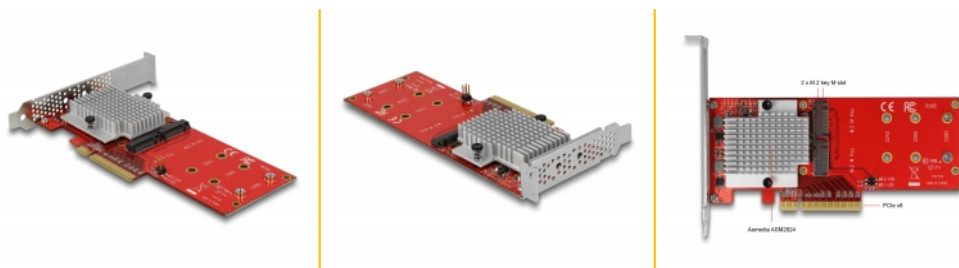

General

| | |
|---|--|
| Function: | NVM Express (NVMe) bootable |
| Supported operating system: | Linux Kernel 3.17 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit |
| Slot: | PCIe |
| Supported module: | M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported |

Interface

| | |
|-----------|---|
| Internal: | 2 x 67 pin M.2 key M slot 1 x PCI Express x8, V3.0 |
|-----------|---|

Technical characteristics

| | |
|----------|-----------------|
| Chipset: | Asmedia ASM2824 |
|----------|-----------------|

Physical characteristics

| | |
|---------------|-------------------------|
| Slot bracket: | standard Low Profile |
|---------------|-------------------------|