


# WLAN MiniPCI Modul 2T2R 300Mbps

## Description

The Delock MiniPCI module offers in a compact construction WLAN function and is ideal for installation in industry components, like sensors, IPCs, PDAs or notebooks.

## Images

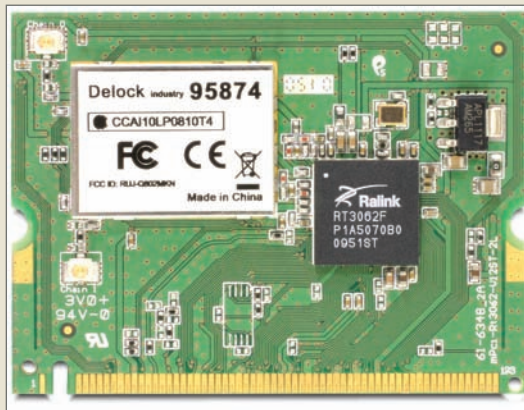

Ref.	95874
EAN	4043619958740
Country of origin	China
Customs tariff number	85176990

## Specification

- MiniPCI specification 1.0
- PCI Bus Interface specification 2.2
- Chipset: Ralink RT3062 (MAC/BBP, transceiver)
- Supports IEEE 802.11 b/g/n
- Supports Security mode: WEP 64/128, WPA, WPA2, 802.1x and 802.11i
- Supports Ad hoc and infrastructure
- Reverse direction data flow
- 2 x mini Coax I-Pex ports for 2 antenna
- Voltage: 3.3V +/- 0.3V
- Power consumption: 410 mA
- Operating temperature: 0°C ~ +65°C
- Weight: 13g
- Dimension: : 44,45 x 59,60 x 3,80 +/- 0,15 (LxWxH)

## System requirement

- Windows CE 5.0 & 6.0/ 2000/XP/XP-64/Vista/Vista-64/7/7-64, Linux Kernels 2.4,2.6, MAC OS 10.3 & 10.4

## Package content

- Module

## Package

- Delock antistatic cover