





Delock industry WLAN USB module 2T2R 300 Mbps

Description

The Delock USB module offers in a compact construction WLAN function via USB interface and is ideal for installation in industry components like sensors, IPCs, PDAs or notebooks.

Images

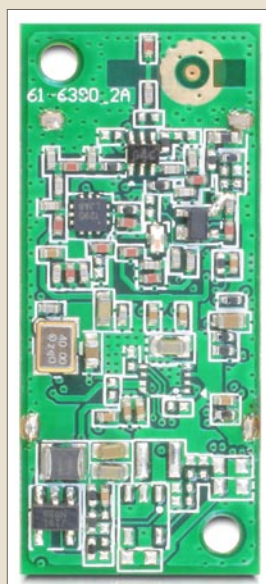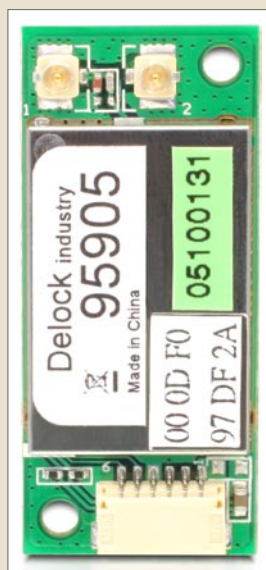

Ref.	95905
EAN	4043619959051
Country of origin	China
Customs tariff number	85176990

Specification

- USB 2.0 interface
- 6 pin SMT port suitable for item 95835 cable
- Antenna interface: 2 x I-PEX, Hirose
- WLAN according IEEE 802.11n and IEEE 802.11 b/g
- Chipset: Ralink RT3072 MAC/BBP/RF
- Voltage: 3,3 V (+/- 0,3 V)
- Power consumption: max. 365 mA
- Operating temperature: 0° ~ +65°C
- 11b: 1,2,5,5,11 Mbps
- 11g: 6,9,12,18,24,36,48,54 Mbps
- 11n (20 MHz): MCS0-15 supports up to 150 Mbps
- 11n (40 MHz): MCS0-15 supports up to 300 Mbps
- Band width: 20/40 MHz, MCS0~7(150Mbps PHY rate)
- WEP 64/128, WPA, WPA2, TKIP, AES
- QoS-WMM, WMM-PS
- WPS, PIN, PBC
- Multiple BSSID support
- Connector for LED indicator
- Dimension: 34 x 15 x 5,4 mm (LxWxH)

System requirement

- Windows CE/2000/XP/Vista/7, Linux, Mac OS

Package content

- Module
- Driver CD

Package

- Antistatic cover