

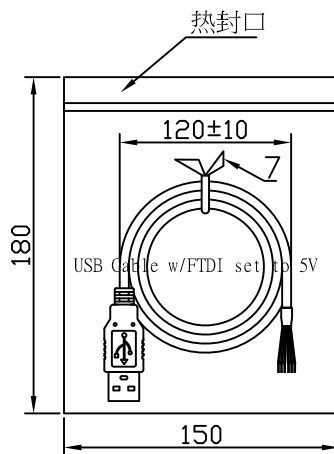
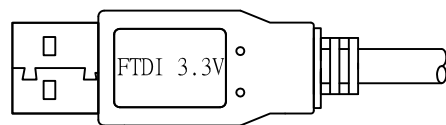


| REV | ECRN | DATE |
|-----|----------------|----------|
| 1 | NEW PRODUCTION | 20150506 |
| 2 | NEW PRODUCTION | 20180319 |
| | | |

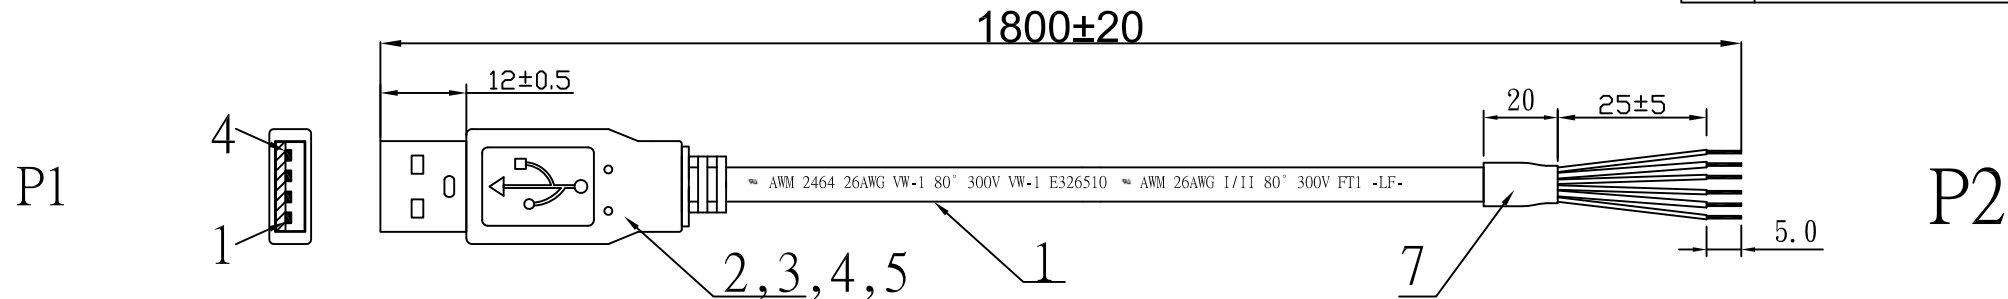


TTL-PCB

TOP



1 2 3

BOTTOM



4 5 6

PIN WIRING

| P1 | | P2 |
|----|----------|--------|
| 1 | RED (5V) | (VCC) |
| 2 | ORANGE | (TXD) |
| 3 | YELLOW | (RXD) |
| 4 | GREEN | (RTS#) |
| 5 | BLACK | (GND) |
| 6 | BROWN | (CTS#) |

模具编号：P-38

NOTES:

- 1.ELECTRICAL TEST:100%OPEN,SHORT&MIS WIRE TEST.
- 2.CONTACT RESISTANCE:0.5ohm,
- 3.INSULATOR RESISTANCE:5M ohm.
- 4.HIGH VOLTAGE:DC 300V 0.01sec.
- 5.MUST BE ROHS COMPLIANT.

| ⑧ | I.180150.0300R | PE BAG | 180*150*0.04MM PE袋 PRINTED BLACK FONT" USB Cable w/FTDI set to 3.3V" | 1 | PCS |
|-----|----------------|-----------|--|-------|------|
| ⑦ | F.0501B0.0100R | TUBE | φ5.5*20mm HEAT TUBE COLOR BLACK | 1 | PCS |
| ⑥ | I.000001.0400R | TIE | TIE BLACK L=70MM | 1 | PCS |
| ⑤ | C.045P01.0100R | MOLDING | PVC 45P BLACK | 5.5 | G |
| ④ | C.000000.0000R | MOLDING | PE | 2.5 | G |
| ③ | J.000008.0500R | TIN WIRE | TIN WIRE OD:0.8MM | 3.5 | G |
| ② | B.01004M.0N06R | CONNECTOR | TTL-PCB(3.3V) USB A/M CONNECTOR PLASTIC: BLACK | 1 | PCS |
| ① | A.009X01.0603R | CABLE | UL2464 26AWG(7/0.16TC)*6C(RED,ORANGE,GREEN, BLACK,YELLOW,BROWN)+AL FOIL PVC JACKET COLOR:BLACK OD=5.0±0.1mm L=1780MM | 1 | PCS |
| NO. | PART NO | ITEM | DESCRIPTION | Q' TY | UNIT |

DELICK®
we move the world

Title: Converter USB 2.0 male > TTL 6 open wires
1.8 m (3.3 V)

| | | | |
|------------|----------------|----------|---------------|
| Date | 2018 / 02 / 01 | Item no. | 83117 |
| Unit | mm | Barcode | 4043619831173 |
| Projection | | File No. | 88203 |
| Rev | A | | |