

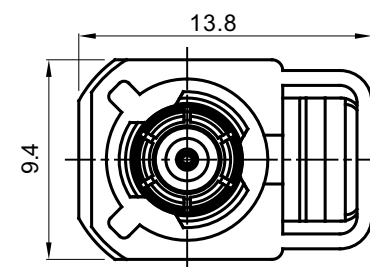


FAKRA H jack 90°

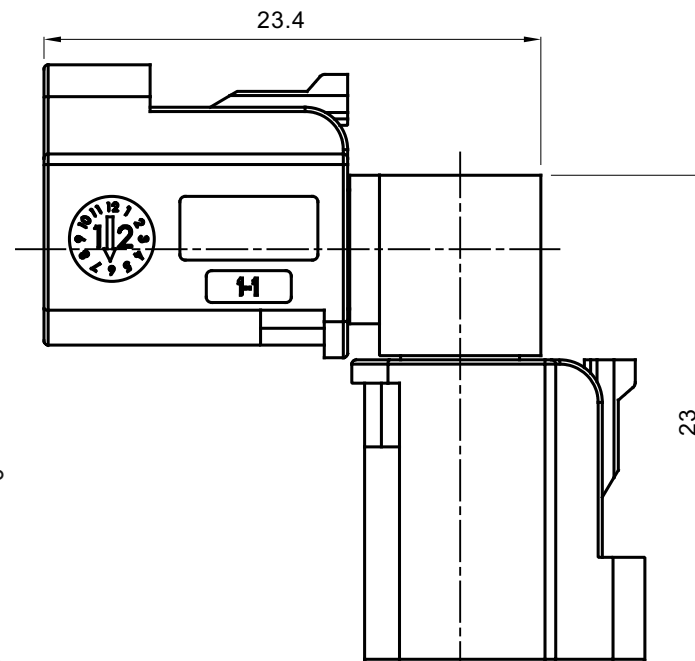

FAKRA K jack

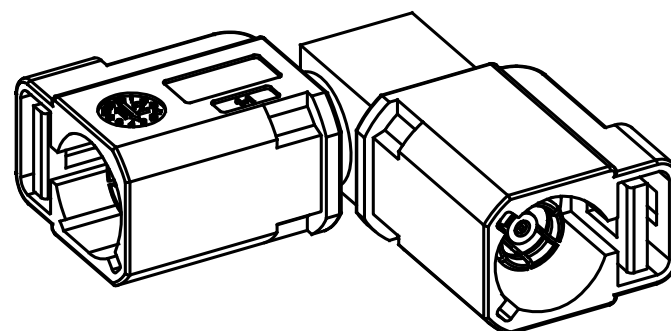

Impedance : 50 Ω  
 Frequency range : 0 - 6 GHz  
 Durability (Matings) : 100 min  
 Plastic housing retention force :  $\geq 110$  N  
 Temperature range : -40°C / +105°C

9	Shell	PA66	RAL 1027 Curry
8	Ring	BeCu	None
7	Insulator	PTFE	White
6	Body	Copper	Nickel
5	Body	Copper	Nickel
4	Pin	P.B.	Gold
3	Insulator	PTFE	White
2	Body	Copper	Nickel
1	Shell	PA66	RAL 4003 Heather violet
No	Description	Material	Finish

**DELOCK®**  
 we move the world

Title: Adapter FAKRA H jack 90° >  
 FAKRA K jack

Date	2018 / 06 / 12	Item no.	89854
Unit	mm	Barcode	4043619898541
Projection			
Rev	A		