


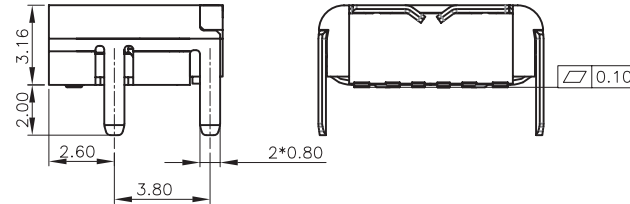



SECTION A-A

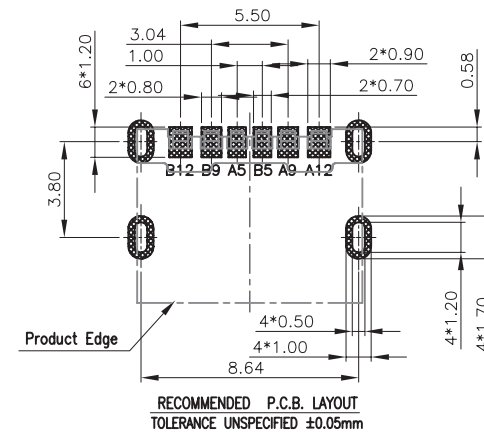

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

Specifications:
 Current Rating: 5.0A AC, DC
 Voltage Rating: 100V AC, DC
 Contact Resistance: 40m Ohm Max
 Insulation Resistance: 100M Ohm Min
 Withstanding Voltage: 100V AC/Minute
 Operating Temperature Range: -40°C to +85°C
 Mechanical:
 Mating Force: 5~20N Max
 Unmating Force: 8~20N Min
 Durability: 10000 cycles Min
 Materials:
 Insulator: High Temp. Plastic (LCP UL94V-0)
 Contact: Brass
 Contact Plating: Gold Plated on Contact Area,
 Matte-Tin Plated on Solder Tail.
 Shell: Stainless Nickel 50u" Plated



DELOCK
 we move the world

Title: USB 5 Gbps Type-C™ Buchse 6 Pin SMD
 Steckverbinder zur Lötmontage 90° gewinkelt

Item no. 66949

Date	2024 / 02 / 20
Unit	mm
Projection	sketch
Rev	A

File No.