

# Delock LTE MIMO GNSS Antenna 3 x SMA plug RG-174 3 m screw mounting outdoor black

#### Description

This antenna by Delock allows the usage of different **LTE** and **GNSS** bands **indoors and outdoors**. It is completely compatible to GSM, UMTS, LTE, ZigBee, DECT, Z-Wave, NB-IoT, GNSS, Bluetooth, ISM, MIMO and LoRa 868 MHz / 915 MHz.



#### Item no. 12700

EAN: 4043619127009 Country of origin: China Package: Box

## Specification

- Connectors: 3 x SMA plug
- 2 x LTE:

Frequency range: 698 MHz - 960 MHz 1710 MHz - 2690 MHz Impedance: 50 Ohm VSWR: 3.0 Antenna gain: 2.0 - 2.5 dBi Polarisation: linear

• GNSS:

Frequency range: GALILEO: E1, 1575.4200 MHz GPS: L1, 1575.4200 MHz Antenna gain: 2 dBi VSWR: 1.5 Impedance: 50 Ohm Polarisation: RHCP

• LNA GNSS:

Frequency range: GALILEO: E1, 1575.4200 MHz GPS: L1, 1575.4200 MHz



Antenna gain: 28 dBi Operating voltage: 2.2 - 5.0 V Current consumption: 5 - 15 mA VSWR: 2.0 Impedance: 50 Ohm

- Mounting type: screw mounting
- Operating temperature: -40 °C ~ 85 °C
- Housing material: ABS
- Protection class: IP67
- Colour: black
- · Cable type: coaxial
- Cable type: RG-174
- Cable colour: black
- Cable diameter: ca. 2.7 mm
- Cable attenuation: 1.5 dB @ 1.5 GHz per meter
- Smallest bending radius: 10.5 mm
- Cable length incl. connector: ca. 3 m
- Dimensions (Ø x H): ca. 81.3 x 16.3 mm

#### System requirements


Device with multiple free SMA ports

#### Package content

• Antenna



## Images

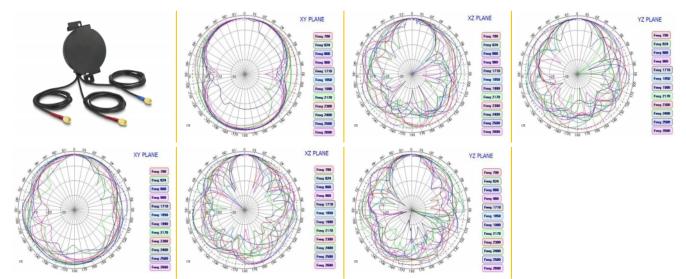

#### **DATASHEET**



#### General

| Mounting type:        | Screw mounting |
|-----------------------|----------------|
| Protection category:  | IP67           |
| Suitable for outdoor: | yes            |

#### Interface

| Connector 1: | 2 x SMA male for LTE |
|--------------|----------------------|
| Connector 2: | 1 x SMA plug GNSS    |

## **Technical characteristics**

| Frequency range:       | 698 MHz - 960 MHz<br>GPS: L1, 1,5754200 GHz<br>1710 MHz - 2690 MHz<br>GALILEO: E1. 1.5754200 GHz |
|------------------------|--|
| Antenna gain:          | LTE MIMO: 2.5 dBi<br>GNSS: 28 dB   |
| Impedance:             | 50 Ω   |
| Operating temperature: | -40 °C ~ 85 °C   |
| Polarisation:          | linear   |
| VSWR:                  | 2.0  |

## **Physical characteristics**

| Housing material:             | ABS                        |
|-------------------------------|----------------------------|
| Cable category:               | coaxial                    |
| Cable type:                   | RG-174                     |
| Cable attenuation:            | 1.5 dB @ 1.5 GHz per meter |
| Cable colour:                 | black                      |
| Cable length incl. connector: | 3 m                        |
| Diameter:                     | 83.3 mm                    |

## **DATASHEET**



| Height:                  | 16.3 mm |
|--------------------------|---------|
| Smallest bending radius: | 10.5 mm |
| Colour:                  | black   |
| Thread type:             | M12     |