


Delock Riser Kartica PCI Express x1 > 2 x PCIe x1 s 30 cm USB-kabelom

Opis

PCI Express Riser kartica tvrtke Delock može se utaknuti u svaki PCI Express x1 utor na matičnoj ploči. PCI Express ploča može biti ugrađena na nekom drugom položaju unutar kućišta. To omogućava rad dviju PCIe kartica u svakom PCIe utoru matične ploče.

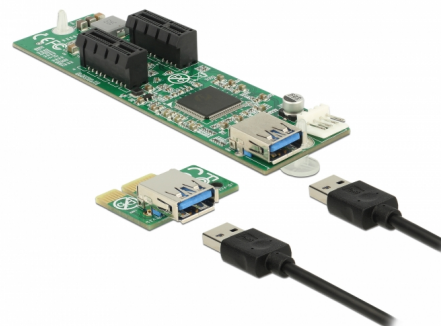

Napomena

Sadržaj paketa ima USB 3.0 Riser kabel duljine 30 cm. USB signali se ne prenose ovim kabelom i stoga se ne može zamijeniti drugačijim, duljim kabelom.

Predmet br. 41433

EAN: 4043619414338

Zemlja podrijetla: China

Pakiranje: Retail Box

Tehnički podaci

- Priključak:
Strana matične ploče:
1 x PCI Express x1
1 x USB 3.0 Tip-A ženski
Strana Riser kartice:
2 x PCI Express x1 ulaz
1 x USB 3.0 Tip-A ženski
1 x Floppy 4-polni priključak za napajanje
- Skup čipova: Pericom PI7C9X2G
- Podaci o kabelu:
1 x Riser kabel USB 3.0 Tip-A muški na muški otpr. 30 cm (sa spojnicima)
1 x kabel napajanja Floppy na Molex otpr. 15 cm (s konektorima)
- Dimenzije Riser kartice (DxŠxV): oko 120 x 34 x 15 mm

Preduvjeti sustava


- Linux Kernel 2.6.38 ili noviji

- Windows 7/7-64/8.1/8.1-64/10/10-64
- Računalo s jednim slobodnim PCI Express x1 / x4 / x8 / x16 / x32 utorom
- Izvor napajanja sa slobodnim Molex priključkom za napajanje

Sadržaj pakiranja

- PCIe na USB Riser karticu
- USB na PCIe Riser karticu
- 1 x USB 3.0 kabel
- 1 x Kabel napajanja

Slike



General

Supported operating system:	Linux Kernel 2.6.38 ili noviji Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	--

Physical characteristics

Duljina:	120 mm
Width:	34 mm
Height:	15 mm