


Delock Converter SATA Host > 2 x SATA Device with RAID

Description

The Delock SATA RAID converter enables you to build a RAID system with two HDD's, as you connect the 22 pin SATA connector to the primary hard disk and connect the second hard disk to the SATA 7 pin device connector. By the second SATA 7 pin connector you embed the converter in your system.

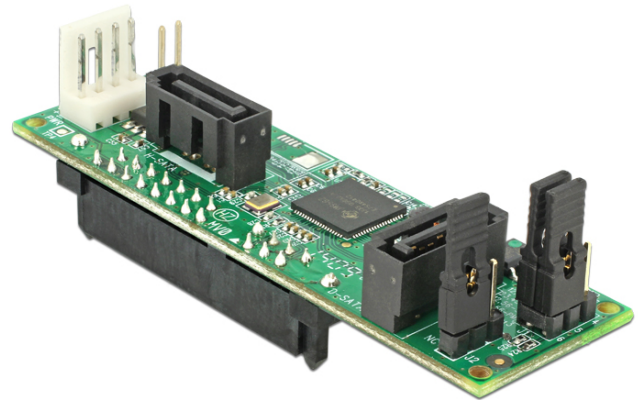

Note

The SMART function is not supported. JBOD is only supported on SATA controllers with port multiplier function.

Specification

- Connector:
 - 1 x SATA 6 Gb/s 22 pin female
 - 2 x SATA 6 Gb/s 7 pin female (1 x host, 1 x device)
 - 1 x 4 pin power connector
 - 1 x LED pin header
 - 2 x jumper for RAID mode
- Chipset: JMS562
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, JBOD, SPAN
- Supports Native Command Queuing (NCQ)
- OS independent, no driver installation necessary

System requirements

- HDD with SATA 22 pin connector
- SATA connecting cable
- Power supply with a free power connector

Package content

- Converter
- Cable SATA 15 pin > 4 pin
- User manual

Item no. 62466

EAN: 4043619624669

Country of origin: Taiwan, Republic of China

Package: • White Box



Images

