


Delock Converter SATA 22 Pin > M.2

Description

This Delock converter enables the connection of a M.2 SSD in 2260, 2242 and 2230 format. It can be used as a replacement for a 2.5" HDD. The converter will be installed into the system internally through a SATA 22 pin interface.

M.2

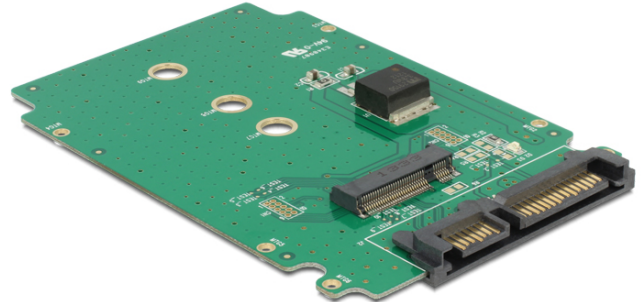

Specification

- Connector:
1 x SATA 22 pin plug >
1 x 67 pin M.2 key B slot
- Interface: SATA
- Supports M.2 modules in format: 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Dimensions (LxWxH): ca. 95.5 x 65.5 x 6.5 mm
- OS independent, no driver installation necessary

System requirements

- A free SATA 22 pin interface

Package content

- Converter
- 1 x fixing screw

Item no. 62521


EAN: 4043619625215

Country of origin: China

Package: • Retail Box



Images



Double - Sided
Module

