


# Converter SATA 22 pin > 1 x M.2 + 1 x mSATA

## Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format or an mSATA SSD in half size or full size format. If both slots are occupied, only the M.2 SSD can be used. The converter will be installed into the system internally through a SATA 22 pin interface.

**M.2**

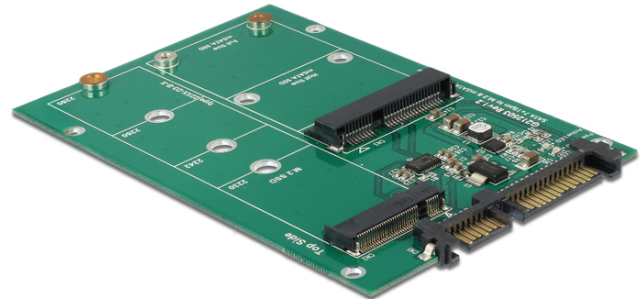

## Specification

- Connector:
  - 1 x SATA 6 Gb/s 22 pin plug >
  - 1 x 67 pin M.2 key B slot
  - 1 x mSATA slot (full size)
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- LED indicator for power and activity
- PWM chipset: max. 3 A output current, short circuit protection, in-rush current suppression, thermal shutdown protection
- Bootable
- Dimensions (LxW): ca. 98 x 65.5 mm
- OS independent, no driver installation necessary

## Item no. 62670

EAN: 4043619626700

Country of origin: Taiwan, Republic of China

Package: Retail Box

## System requirements

- A free SATA 22 pin interface

## Package content

- Converter
- Mounting material
- User manual

## Images

