


# Delock 2.5" Converter SATA Express > 2 x M.2 with Enclosure 9.5 mm

## Description

This Delock converter enables the connection of up to two M.2 SSD in 2280, 2260, 2242 and 2230 format. The converter can be installed into the system internally through the SATA Express interface.

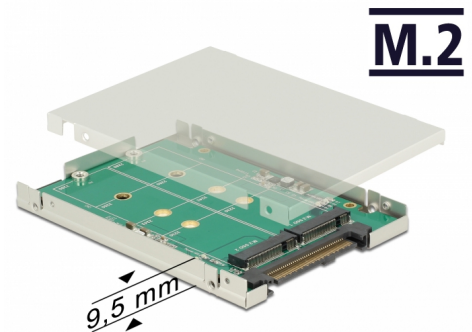

**Item no. 62785**

EAN: 4043619627851

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Specification

- Connector:
  - 1 x SATA Express 29 pin male >
  - 2 x 67 pin M.2 key B slot
- Interface: SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- Maximum current for M.2 module: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- LED indicator
- Dimensions (LxWxH): ca. 100 x 70 x 9.5 mm

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.3 / Kernel 4.x.x
- A free SATA Express interface

---

## Package content

- Converter
- 2.5" enclosure
- Fixing screws for M.2 module, screws for enclosure
- User manual

---

## Images



## General

Form factor:	2.5"
Supported operating system:	Linux Kernel 3.3 or above Linux Kernel 4.x or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Protection:	Short circuit protection Overheating protection

## Interface

Connector 1:	1 x SATA Express 29 pin male
Connector 2:	2 x 67 pin M.2 key B slot

## Physical characteristics

Length:	100 mm
Width:	70 mm
Height:	9.5 mm