


Delock 2.5" Converter USB 3.1 Micro-B female > M.2 + mSATA with Enclosure 9.5 mm

Description

This Delock converter enables the connection of an M.2 SSD in 2280, 2260, 2242 and 2230 format and an mSATA SSD in half size or full size format. Both SSDs can be used simultaneously. The converter can be installed into the system through the USB interface.

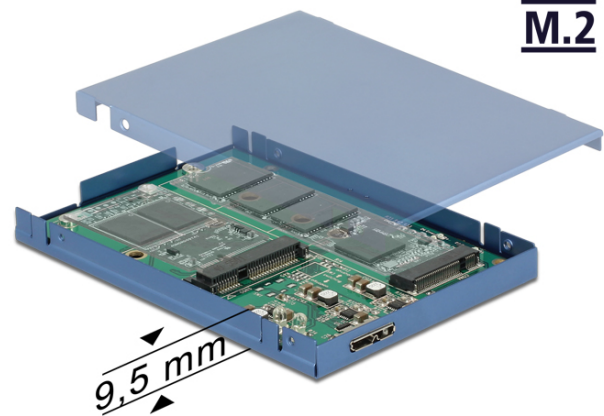

Specification

- Connector:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type Micro-B female >
 - 1 x 67 pin M.2 key B slot
 - 1 x mSATA slot (half size / full size)
- Interface: SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- LED indicator
- Maximum power for modules: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 100 x 70 x 9.5 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.6
- A free USB interface

Package content

- Converter
- 2.5" enclosure
- Fixing screws for M.2 module, mSATA module and enclosure
- Cable USB 3.1 Type Micro-B to Type-A, length ca. 35 cm
- Cooling pad for M.2 and mSATA module
- User manual

Item no. 62787

EAN: 4043619627875

Country of origin: Taiwan, Republic of China

Package: • Retail Box



Images



General

Form factor:	2.5"
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Protection:	Short circuit protection Overheating protection

Interface

Connector 1:	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type Micro-B female
Connector 2:	1 x 67 pin M.2 key B slot
connector 3:	1 x mSATA slot (half size / full size)

Physical characteristics

Length:	100 mm
Width:	70 mm
Height:	9.5 mm