


Delock 2.5" Converter SATA 22 pin > M.2 with Enclosure

Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format. It can be used as a replacement for a 2.5" HDD. The converter will be installed into the system internally through a SATA 22 pin interface.

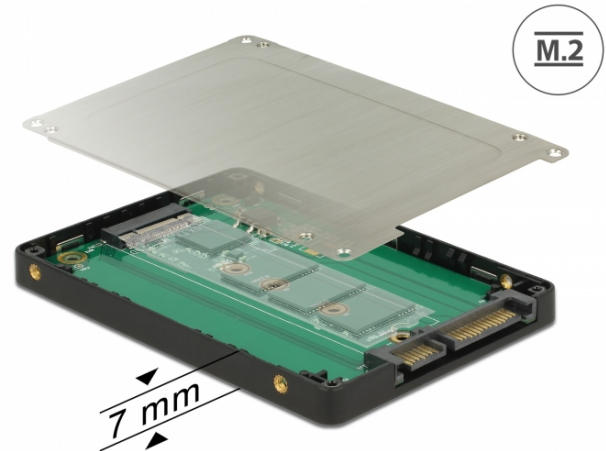

Specification

- Connectors:
 - 1 x SATA 6 Gb/s 22 pin plug >
 - 1 x 67 pin M.2 key B slot
- Interface: SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.25 mm
application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Bootable
- Operating temperature: 0 °C ~ 70 °C
- Storage temperature: -40 °C ~ 85 °C
- Dimensions (LxWxH): ca. 100 x 70 x 8 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.16.0
- A free SATA 22 pin interface

Package content

- Converter
- 1 x fixing screw
- Screwdriver
- User manual



Item no. 62792

EAN: 4043619627929

Country of origin: Taiwan, Republic of China

Package: Retail Box

Images



| General | |
|---|--|
| Form factor: | 2.5" |
| Function: | bootable |
| Supported operating system: | Linux Kernel 3.16 or above Windows 10 32-bit Windows 10 64-bit Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit |
| Slot: | SATA |
| Supported module: | M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA |
| Maximum height of the components on the module: | 1.25 mm application of double-sided assembled modules supported |
| Interface | |
| Connector 1: | 1 x SATA 6 Gb/s 22 pin plug |
| Connector 2: | 1 x 67 pin M.2 key B slot |
| Technical characteristics | |
| Data transfer rate: | 6 Gb/s |
| Physical characteristics | |
| Length: | 100 mm |
| Width: | 70 mm |
| Height: | 8 mm |
| Colour: | black silver |