


# Delock Converter M.2 Key B+M male to USB Type-C™ female

## Description

This converter by Delock expands the system by one **USB Type-C™** port. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the converter.

### Supports SuperSpeed USB 10 Gbps

A maximum data transfer rate of up to USB 3.2 Gen 2 - 10 Gbps can be reached.

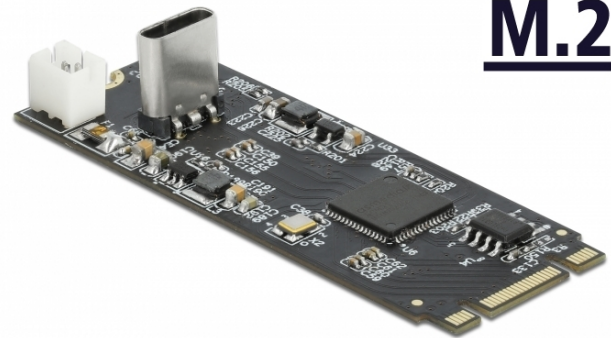

**M.2**

## Specification

- Connectors:
  - 1 x 59 pin M.2 key B+M male >
  - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
  - 1 x 2 pin power connector
- Chipset: Asmedia ASM3142
- Interface: PCIe
- Form factor: M.2 2260
- Suitable for M.2 slot with key M or B based on PCIe
- Data transfer rate up to 10 Gbps
- Bootable
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Electrical power: max. 15 watt (5 V / 3 A)
- Supports Multiple INs
- Dimensions (LxWxH): ca. 60 x 22 x 11 mm

Item no. 63174

EAN: 4043619631742

Country of origin: China

Package: • Retail Box

## System requirements

- Linux Kernel 3.3 or above
- Windows 8.1/8.1-64/10/10-64
- A free M.2 key M or key B slot

## Package content

- Converter
- Power cable 2 pin to Molex, length ca. 30 cm
- Screws
- User manual

## Images



**General**

|                             |   |
|-----------------------------|---|
| Form factor:                | M.2 2280  |
| Supported operating system: | Linux Kernel 3.3 or above<br>Windows 10 32-bit<br>Windows 10 64-bit<br>Windows 8.1 32-bit<br>Windows 8.1 64-bit |

**Interface**

|              |   |
|--------------|---|
| Connector 1: | 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female |
|--------------|---|

**Technical characteristics**

|                     |                 |
|---------------------|-----------------|
| Chipset:            | Asmedia ASM3142 |
| Data transfer rate: | 10 Gbps         |