

# Delock Adaptor USB 2.0 Tip-A la 1 x serial RS-422/485 tată cu 6 pini bloc terminal 5 V, 1,8 m

## Descriere scurta


Acest adaptor USB 2.0 la serial de la Delock oferă o conectare standard RS-422 și RS-485 pentru dispozitive de măsurare, sisteme POS, imprimante, modemuri, dispozitive IoT etc.

## Bloc terminal

Blocul terminal este potrivit pentru instalarea în carcase PC și pentru orice conexiune prin cablu fără sudură cu interfață RS-422 sau RS-485.

## Sursă de alimentare

Opțional, dispozitivele externe pot fi alimentate cu o tensiune de 5 V prin intermediul blocului terminal.

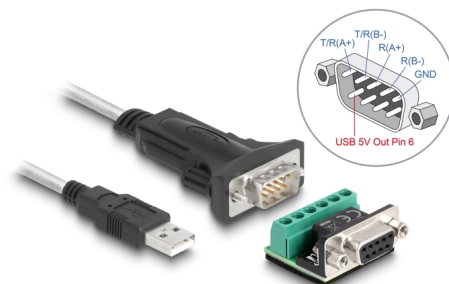

1,8 m

**Nr. 63465**

EAN: 4043619634651

Țara de origine: China

Pachet: Retail Box

## Detalii tehnice

- Conectori:
  - Adaptor:
    - 1 x USB 2.0 Tip-A tată
    - 1 x serial RS-422/485 D-sub 9 pini tată cu șuruburi
  - Bloc de conexiuni:
    - 1 x serial RS-422/485 D-sub 9 pini mamă cu piulițe
    - 1 x bloc de conexiuni cu 6 pini
- Bloc terminal: T/R+, T/R-, RXD+, RXD-, GND, VCC
- Chipset: FTDI FT232R
- Rată de transfer a datelor de până la 921,6 Kbps
- Rezistor de terminare RS-422/485: 120 Ω
- Lungime cablu, inclusiv conectoare: cca. 1,8 m

## Cerinte de sistem


- Linux Kernel 5.11 sau superior
- Mac OS 11.6 sau superior

- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019
- PC sau laptop cu un port USB Tip-A liber

## Pachetul contine

- USB 2.0 la 1 x seriale RS-422/485 adaptoare
- Adaptor pentru bloc
- CD cu drivere
- Manual de utilizare

## Imagini



G3465	D09 Buchse/Male		Terminalblock/Terminal Block
	RS-422	RS-485	RS-422/RS-485
1	Transmit (A+)	T/R (A+)	T/R (A+)
2	Transmit (B-)	T/R (B-)	T/R (B-)
3	Receive (A+)	NC	Receive (A+)
4	Receive (B-)	NC	Receive (B-)
5	Signal GND (SG)	Signal GND (SG)	Signal GND (SG)
6	USB 5 V	USB 5 V	USB 5 V
7	NC	NC	NC
8	NC	NC	NC
9	NC	NC	NC

## General

Function:	Plug & Play
Specification:	RS-422 / RS-485 (EIA / TIA) USB 2.0
Supported operating system:	Linux Kernel 2.6 sau superior Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2012 R2 Windows Server 2016 Windows Server 2019 Mac OS 11.1 or above Windows 11
Protection:	ESD (Electrostatic Discharge)

## Interface

Conector 1:	1 x USB Tip-A tată
Conector 2:	1 x Serial RS-422/485 DB9 male
connector 3:	1 x bloc de conexiuni cu 6 pini

## Technical characteristics

Chipset:	FTDI FT232RL
Data transfer rate:	up to 921.6 Kbps
FIFO:	1 x 128 byte receive 1 x 256 byte transmit
Signal transmission:	T/R+, T/R-, RXD+, RXD-, GND, VCC
Data transmission:	Semi duplex full duplex asynchronous Bi-directional differential
Voltage:	5 V output voltage

UART:	USB to serial UART
Resistor:	Termination resistors 120 Ω
Support:	Modbus

### Physical characteristics

Carcasa uloare:	negru
Cable colour:	transparentă
Cable length incl. connector:	180 cm
Tipul șurubului:	#4-40 UNC
Shielding:	double