


Delock Adapter Mini PCIe > M.2 Key E slot

Description

This Adapter by Delock enables the connection of an M.2 module in 2242, 2230, 3042 or 3030 format. The adapter can be installed into the system through a Mini PCIe interface. Through the predetermined breaking point, the length can be shortened from full size to half size.

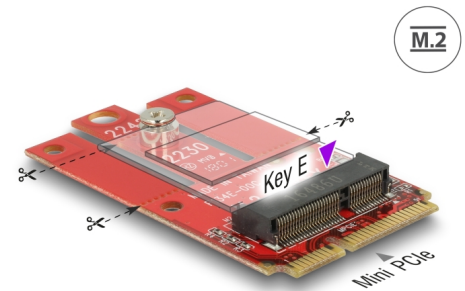

Item no. 63909

EAN: 4043619639090

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x Mini PCIe male >
 - 1 x 67 pin M.2 key E slot
- Interface: USB 2.0 / PCIe
- Form factor: Mini PCIe full size / half size
- Supports M.2 modules in format 2242, 2230, 3042 and 3030 with key E or key A+E based on USB / PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Dimensions (LxW): ca. 54 x 30 mm

System requirements

- Linux Kernel 3.2 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- Motherboard with a free Mini PCIe slot with a USB / PCIe interface

Package content

- Adapter
- Screws
- User manual

Images



General

Form factor:	Mini PCIe full size Mini PCIe half size
Supported operating system:	Linux Kernel 3.3 or above Linux Kernel 4.x or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe USB
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x Mini PCIe male
Connector 2:	1 x 67 pin M.2 key E slot

Physical characteristics

Length:	54 mm
Width:	30 mm

Herstellerinformation

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de