


Delock External Industry Hub 10 x USB 3.0 Type-A with 20 kV ESD protection

Description

This solid industry capable USB hub by Delock can be connected to a computer via the USB Type-A interface. It expands the computer by ten USB Type-A connectors. If necessary, an optional power supply or an optional power cable can be connected to the power socket.

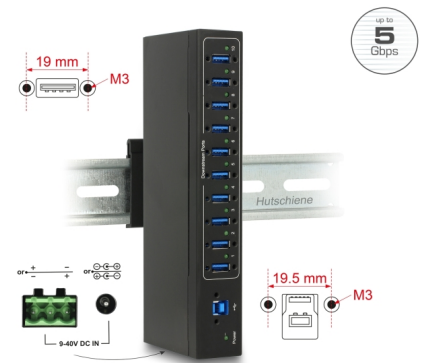

Item no. 63919

EAN: 4043619639199

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x USB 3.0 Type-B female >
 - 10 x USB 3.0 Type-A female
 - 1 x 9 – 40 V DC jack
 - 1 x 3 pin terminal power connector
- Chipset: VIA VL817
- Data transfer rate up to:
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- 11 x LED indicator
- USB ports with screw holes
- Robust metal housing
- Pitch of screw hole USB Type-A: ca. 19 mm
- Pitch of screw hole USB Type-B: ca. 19.5 mm
- Thread size: M3
- Removable wall-mount brackets

- Power supply: Bus-powered or Self-powered
 - Flexible power supply with 9 V to 40 V
 - Automatic detection of the input polarity of the power connectors
 - ESD protection up to 20 kV for all ports
 - Dimensions (LxWxH): ca. 202 x 80 x 32 mm
 - Colour: black
 - Plug & Play
-

Specification of power connector

- 9 - 40 V
 - Dimensions:
 - inside: \varnothing ca. 2.1 mm
 - outside: \varnothing ca. 5.5 mm
 - length: ca. 9 mm
-

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.16.x, Mac ex OS 10.9
 - PC or laptop with a free USB Type-A port
-

Package content

- Hub USB
- 1 x cable USB A male to USB B male, length ca. 1 m
- 2 x wall mounting brackets
- 1 x mounting for 35 mm DIN rail
- 1 x 3 pin terminal block
- User manual

Images



General

| | |
|-----------------------------|---|
| Function: | Battery Charging BC1.2 Plug & Play |
| Mounting type: | DIN rail Screw mounting |
| Supported operating system: | Linux Kernel 3.16 or above Mac OS 10.9 or above Windows 10 32-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit |
| LED indicator: | 11 x |

Interface

| | |
|--------------|--|
| Connector 1: | 1 x USB 5 Gbps Type-B female |
| Connector 2: | 10 x USB 5 Gbps Type-A female - Battery Charging specification BC1.2 |
| connector 3: | 1 x 9 – 40 V DC jack |
| connector 4: | 1 x 3 pin terminal power connector |

Physical characteristics

| | |
|---------|--------|
| Length: | 202 mm |
| Width: | 80 mm |
| Height: | 32 mm |
| Colour: | black |