


Delock Terminal block for PCB soldering version 2 pin 5.00 mm pitch vertical 10 pieces

Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

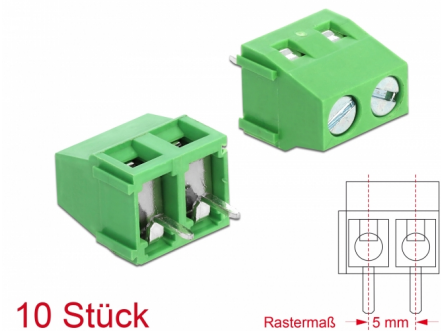

Item no. 65998

EAN: 4043619659982

Country of origin: China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x 2 pin terminal block screw terminal
 - 1 x 2 soldering pin
- Pitch: 5.00 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 26 to 14 AWG
- Withstanding voltage: AC 2000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 250 V
- Rated current according to: UL: 12 A, IEC: 15 A
- Insulation resistance: 500 MΩ / DC 500 V
- Material: plastic
- Colour: green
- Dimensions (LxWxH): ca. 10.1 x 10.0 x 8.4 mm

Package content

- 10 x Terminal block

Rastermaß 5 mm

2 Pin

Leiterschleife

for AWG from 26 to 14

General

Suitable for conductor gauge:	26 - 14 AWG
Mounting type:	Soldering

Interface

Connector 1:	1 x 2 pin terminal block screw terminal
Connector 2:	1 x 2 soldering pin

Technical characteristics

Storage temperature:	-40 °C ~ 105 °C
Resistor:	500 MΩ / DC 500 V

Physical characteristics

Pitch distance:	5 mm
Housing material:	Plastic
Length:	10,1 mm
Width:	10.0 mm
Height:	8.4 mm
Colour:	green