


# Delock Terminal block for PCB soldering version 2 pin 5.08 mm pitch vertical 10 pieces

## Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

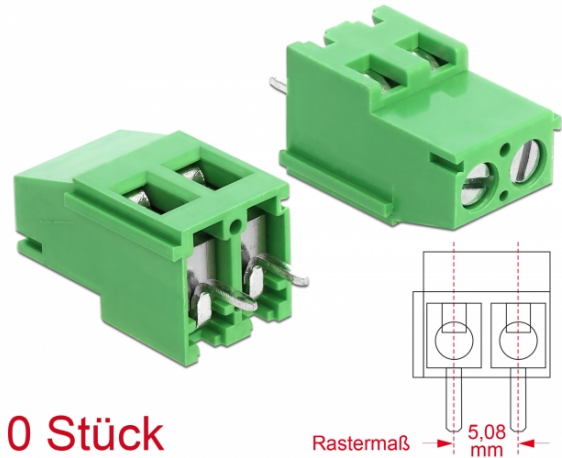

10 Stück

Rastermaß → 5,08 mm ←

## Specification

- Connectors:
  - 1 x 2 pin terminal block screw terminal
  - 1 x 2 soldering pin
- Pitch: 5.08 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 24 to 12 AWG
- Withstanding voltage: AC 2000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 250 V
- Rated current according to: UL: 20 A, IEC: 20 A
- Insulation resistance: 500 MΩ / DC 500 V
- Material: plastic
- Colour: green
- Dimensions (LxWxH): ca. 18.2 x 10.7 x 10.1 mm

## Item no. 66013

EAN: 4043619660131

Country of origin: China




Package: Poly bag



## Package content

- 10 x Terminal block

## Images



General	
Suitable for conductor gauge:	24 - 12 AWG
Mounting type:	Soldering
Interface	
Connector 1:	1 x 2 pin terminal block screw terminal
Connector 2:	1 x 2 soldering pin
Technical characteristics	
Storage temperature:	-40 °C ~ 105 °C
Resistor:	500 MΩ / DC 500 V
Physical characteristics	
Pitch distance:	5.08 mm
Housing material:	Plastic
Length:	18.2 mm
Width:	10.7 mm
Height:	10,1 mm
Colour:	green