


# Delock Terminal block for PCB soldering version 3 pin 5.08 mm pitch vertical 10 pieces

## Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

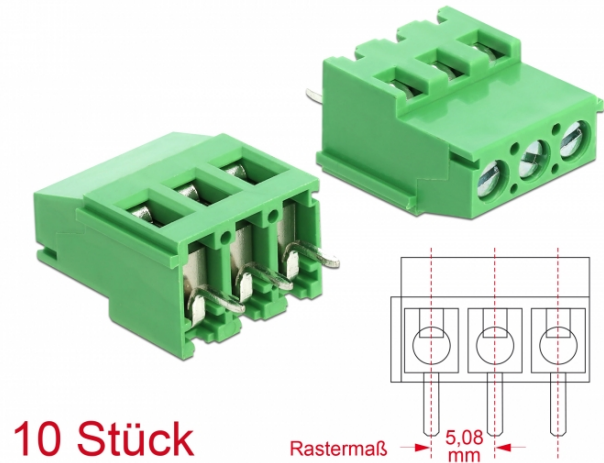

## Specification

- Connectors:  
1 x 3 pin terminal block screw terminal  
1 x 3 soldering pin
- Pitch: 5.08 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 24 to 12 AWG
- Withstanding voltage: AC 2000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 250 V
- Rated current according to: UL: 20 A, IEC: 20 A
- Insulation resistance: 500 MΩ / DC 500 V
- Material: plastic
- Colour: green
- Dimensions (LxWxH): ca. 18.2 x 15.0 x 10.7 mm

## Item no. 66014

EAN: 4043619660148

Country of origin: China


Package: Poly bag



## Package content

- 10 x Terminal block

## Images

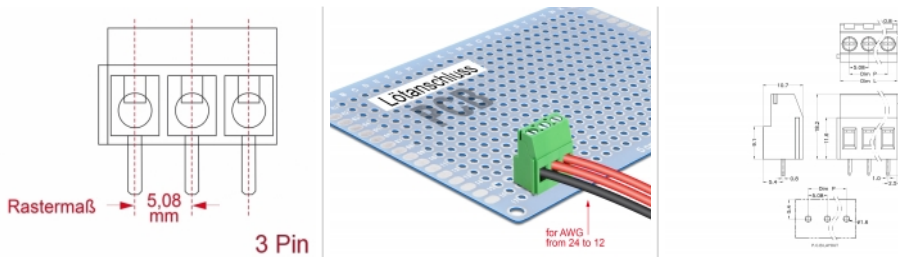

| General                       |   |
|-------------------------------|---|
| Suitable for conductor gauge: | 24 - 12 AWG                             |
| Mounting type:                | Soldering                               |
| Interface                     |   |
| Connector 1:                  | 1 x 3 pin terminal block screw terminal |
| Connector 2:                  | 1 x 3 soldering pin                     |
| Technical characteristics     |   |
| Storage temperature:          | -40 °C ~ 105 °C                         |
| Resistor:                     | 500 MΩ / DC 500 V                       |
| Physical characteristics      |   |
| Pitch distance:               | 5.08 mm                                 |
| Housing material:             | Plastic                                 |
| Length:                       | 18.2 mm                                 |
| Width:                        | 15.0 mm                                 |
| Height:                       | 10.7 mm                                 |
| Colour:                       | green                                   |