




# Delock Terminal block for PCB soldering version 2 pin 6.35 mm pitch vertical 10 pieces

#### Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

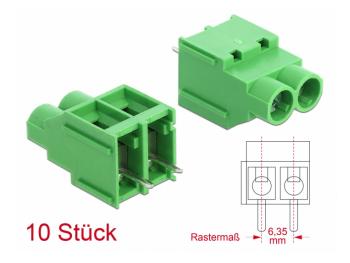

# **Specification**

- Connectors:
- 1 x 2 pin terminal block screw terminal
- 1 x 2 soldering pin
- Pitch: 6.35 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 26 to 10 AWG
- Withstanding voltage: AC 3000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 450 V
- · Rated current according to: UL: 30 A, IEC: 41 A
- Insulation resistance: 500 M $\Omega$  / DC 500 V
- · Material: plastic
- · Colour: green
- Dimensions (LxWxH): ca. 21.5 x 13.0 x 12.7 mm

## Package content

• 10 x Terminal block

#### Item no. 66019


EAN: 4043619660193


Country of origin: China

Package: Poly bag



## **Images**

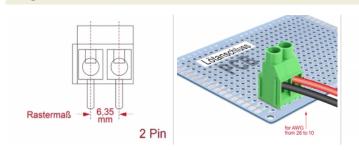







General	
Suitable for conductor gauge:	26 - 10 AWG
Mounting type:	Soldering
Interface	
Connector 1:	1 x 2 pin terminal block screw terminal
Connector 2:	1 x 2 soldering pin
Technical characteristics	
Storage temperature:	-40 °C ~ 105 °C
Resistor:	500 MΩ / DC 500 V
Physical characteristics	
Pitch distance:	6.35 mm
Housing material:	Plastic
Length:	21.5 mm
Width:	13.0 mm
Height:	12.7 mm
Colour:	green