

# Delock DIP sliding switch 7-digit 2.54 mm pitch THT vertical red 5 pieces

## Description


This DIP sliding switch by Delock is suitable for the through-hole mounting on a PCB.

## THT Assembly Technology

The attached soldering pins on the DIP switch can be inserted through contact holes on a PCB and soldered from the bottom side. The switching rows are used to set configurations and to change parameters.

## Multifunctional application

The DIP switch is mainly used in telecommunications, computers and measuring.

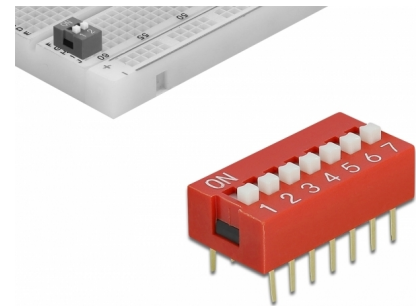

5 x

**Item no. 66357**

EAN: 4043619663576

Country of origin: China

Package: Tube

## Specification

- Connectors:  
2 x 7 soldering pin
- Number of positions: 7
- Pitch: 2.54 mm
- Switch position: on / off
- Switching rating: 25 mA, 24 VDC
- Insulation resistance: 100 MΩ / 500 VDC
- Withstanding voltage: 300 VAC / 1 minute
- Soldering temperature: 250 °C for ca. 3 - 5 seconds
- Mechanical life: 2000 cycles
- Environmental temperature: -40 °C ~ 85 °C
- Operating temperature: -40 °C ~ 85 °C
- Material: plastic
- Colour: red
- Dimensions (LxWxH): ca. 19.2 x 9.9 x 5.5 mm



---

## Package content

- 5 x DIP sliding switch

---

## Images



## General

Mounting type:	Soldering
----------------	-----------

## Interface

connector:	2 x 3 soldering pin 2 x 7 soldering pin
------------	--

## Technical characteristics

Storage temperature:	-40 °C ~ 85 °C
Operating temperature:	-40 °C ~ 85 °C
Resistor:	100 MΩ / 500 VDC

## Physical characteristics

Pitch distance:	2.54 mm
Material:	Plastic
Length:	9.9 mm 19.2 mm
Width:	9.9 mm 9.0 mm
Height:	5.5 mm
Switch:	On / Off
Colour:	red