


Delock Adapter cable USB Type-A to Serial RS-232 RJ10 with ESD protection Meade Autostar 2 m

Description

This USB to RS-232 RJ10 adapter cable by Delock is suitable for the PC operation of hand control boxes by the Meade Autostar Telescopes. With the appropriate astronomy applications, the position of the telescope can be controlled by the computer or a firmware update can be carried out.

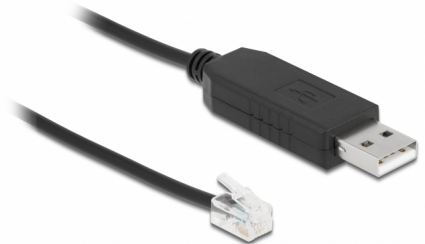

2 m

Compatible Devices:

All DS Models
All DS2000 Models
All ETX Models
All LX90 Models
All LXD55 Models
All LXD75 Models
All LT Models

Item no. 66738

EAN: 4043619667383

Country of origin: China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x USB 2.0 Type-A male
 - 1 x Serial RS-232 RJ10 plug
- Chipset: FTDI FT231X
- Plug & Play
- FIFO: 512 Byte - TX
- FIFO: 512 Byte - RX
- Compatible with USB 3.0, USB 2.0, and USB 1.1 full speed 12 Mbps
- Data transfer rate up to 230.4 Kb/s
- Signals: GND(1), RXD(3), TXD(4)
- ESD protection IEC 61000-4-2
 - HCP & VCP: ± 4 kV
 - Air Discharge: ± 8 kV
 - Contact Discharge: ± 4 kV
- Colour: black
- Cable length incl. connectors: ca. 2.0 m
- Suitable for various Meade Autostar hand controllers


System requirements

- Windows 8.1/8.1-64/10/10-64/11
- PC or laptop with a free USB Type-A port

Package content

- Adapter cable USB 2.0 Type-A to RS-232 RJ10

Images



General

Specification:	RS-232 (EIA / TIA) USB 2.0
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

Interface

Connector 1:	1 x USB 2.0 Type-A male
Connector 2:	1 x RJ10 plug

Technical characteristics

Chipset:	FTDI FT231XS
Data transfer rate:	bis zu 230,4 Kbps
FIFO:	2 x 512 Byte
Signal transmission:	TxD, RxD und GND
UART:	USB to serial UART

Physical characteristics

Cable length incl. connector:	2 m
Colour:	black
Overvoltage protection:	±8 kV EN / IEC 61000-4-2 Air Gap Discharge ±4 kV EN / IEC 61000-4-2 Contact Discharge ±4 kV EN / IEC 61000-4-2 VCP & HCP