

Delock Fiber Optic HD (High Density) Cassette MPO male to 12 x SC Simplex female, 12 fibers, Single-mode, Polarity A, 9/125 µm

Description

This cassette by Delock is equipped with an MPO male port and twelve SC Simplex female ports and is suitable for installation in 19" fiber optic HD (High Density) patch panel by Delock (66924). The cassette contains a pre-assembled cabling system, so that the optical fiber signal can be transmitted to different network devices such as switches.



Item no. 66936

EAN: 4043619669363

Country of origin: China

Package: Box

Specification

- Connectors:
 - 1 x MPO male >
 - 12 x SC Simplex female
- For 12 Single-mode fibers
- Zirconia ceramic ferrule with protection cap
- For mounting in 19" fiber optic HD (High Density) patch panel, 1U
- Tool-free installation
- Fibre: 9/125 µm
- Polarity A
- Insertion loss < 0.7 dB (MPO), < 0.2 dB (SC)
- Return loss > 60 dB (MPO), > 60 dB (SC)
- Housing material: metal
- Housing colour: black
- Dimensions (LxWxH): ca. 125 x 102 x 29 mm


System requirements

- 19" fiber optic HD (High Density) patch panel

Package content

- Fiber optic HD (High Density) cassette

Images

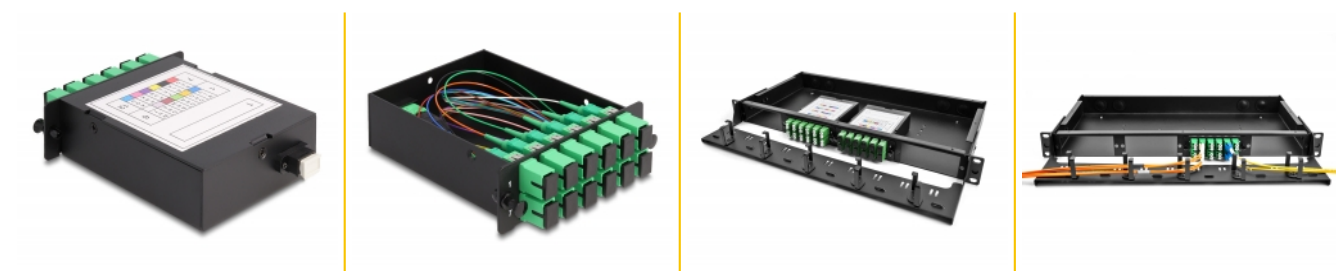

Interface

| | |
|--------------|------------------------|
| Connector 1: | 1 x MPO male |
| Connector 2: | 12 x SC Simplex female |

Physical characteristics

| | |
|-------------------|--------|
| Housing colour: | black |
| Housing material: | metal |
| Length: | 125 mm |
| Width: | 102 mm |
| Height: | 29 mm |