


# Cable DisplayPort 1.2 male > High Speed HDMI-A male passive 4K 30 Hz 2 m white

## Description

This cable by Delock enables the connection between devices, e.g. a monitor, with HDMI connector to a DisplayPort interface.

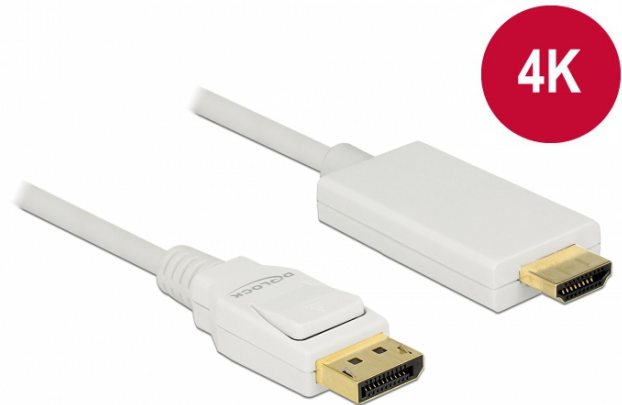

ca. 2 m

## Specification

- Connectors:
  - 1 x DisplayPort 20 pin male >
  - 1 x High Speed HDMI-A 19 pin male
- Chipset: Parade PS8402A
- DisplayPort 1.2a and High Speed HDMI specification
- Passive cable (level shifter), suitable only for graphics cards with DP++ output
- Signal direction: DisplayPort input > HDMI output
- Cable gauge: 30 AWG
- Cable diameter: ca. 6 mm
- Twisted-pair cabling
- Copper conductor
- Gold-plated connectors
- Triple shielded cable
- Transfer of audio and video signals
- Data transfer rate up to 10.2 Gb/s
- Resolution up to 3840 x 2160 @ 30 Hz (depending on the system and the connected hardware)
- Colour: white
- Length incl. connectors: ca. 2 m

## System requirements

- One free DisplayPort DP++ female

## Package content

- DisplayPort to HDMI cable

## Item no. 83818

EAN: 4043619838189

Country of origin: China

Package: Zip poly bag

## Images



General	
Specification:	DisplayPort 1.2a High Speed HDMI
Interface	
Connector 1:	1 x DisplayPort male
Connector 2:	1 x HDMI-A male
Technical characteristics	
Chipset:	Parade PS8402A
Data transfer rate:	10.2 Gb/s
Maximum screen resolution:	3840 x 2160 @ 30 Hz
Physical characteristics	
Cable diameter:	6 mm
Connector finishing:	gold-plated
Pin finishing:	gold-plated
Conductor material:	copper
Conductor gauge:	30 AWG
Shielding:	triple
Length:	2 m
Colour:	white