


Delock Cable SATA 6 Gb/s 7 pin receptacle + Floppy 4 pin power receptacle (5 V + 12 V) > SATA 22 pin receptacle downwards angled 30 cm

Descrizione

This cable by Delock enables the connection of a device with 22 pin SATA interface over a free SATA port and a free 4 pin Floppy power interface of the motherboard.

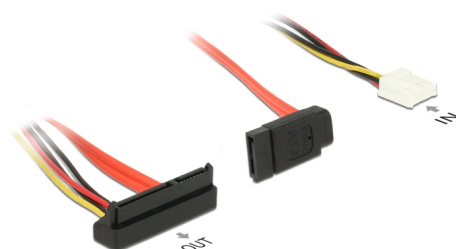

ca. 30 cm

Articolo n. 84854

EAN: 4043619848546

Paese di origine: China

Pacchetto: Sacchetto in plastica con cerniera

Specifiche

- Connector:
SATA 6 Gb/s 7 pin receptacle upwards angled + Floppy 4 pin power receptacle >
SATA 6 Gb/s 22 pin (7 pin data + 15 pin power) receptacle downwards angled
- Compatible to motherboards of the Fujitsu D3003/3313 series and Gigabyte GA-H110TN Mini-ITX series
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Version with 4 power wires (yellow = 12 V, black = GND, red = 5 V)
- Voltage: 5 V + 12 V
- Cable gauge:
30 AWG data line
22 AWG power line
- Length without connector: ca. 30 cm

Requisiti di sistema

- A free SATA interface
- A free Floppy power plug

Contenuto della confezione

- SATA cable

Immagini



General

Specification:	SATA 6 Gb/s
----------------	-------------

Interface

Connettore 1:	1 x SATA 6 Gb/s a 22 pin femmina
Connettore 2:	1 x connettore di alimentazione floppy a 4 pin femmina 1 x SATA 6 Gb/s a 7 pin femmina

Technical characteristics

Data transfer rate:	6 Gb/s
Voltage:	5 V 12 V

Physical characteristics

Conductor gauge:	30 AWG data line 22 AWG power line
Lunghezza:	30 cm