


Delock Cable SATA 6 Gb/s 7 pin receptacle + Floppy 4 pin power receptacle (5 V + 12 V) > SATA 22 pin receptacle downwards angled 30 cm

Descriere scurta

This cable by Delock enables the connection of a device with 22 pin SATA interface over a free SATA port and a free 4 pin Floppy power interface of the motherboard.

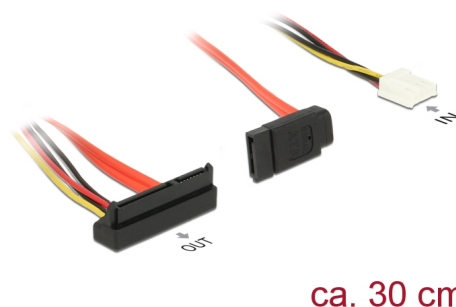

Nr. 84854

EAN: 4043619848546

Țara de origine: China

Pachet: Pungă din plastic
cu închidere tip fermoar

Specification

- Connector:
SATA 6 Gb/s 7 pin receptacle upwards angled + Floppy 4 pin power receptacle >
SATA 6 Gb/s 22 pin (7 pin data + 15 pin power) receptacle downwards angled
- Compatible to motherboards of the Fujitsu D3003/3313 series and Gigabyte GA-H110TN Mini-ITX series
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Version with 4 power wires (yellow = 12 V, black = GND, red = 5 V)
- Voltage: 5 V + 12 V
- Cable gauge:
30 AWG data line
22 AWG power line
- Length without connector: ca. 30 cm

Cerinte de sistem

- A free SATA interface
- A free Floppy power plug

Pachetul contine

- SATA cable

Imagini



General

Specification:	SATA 6 Gb/s
----------------	-------------

Interface

Conector 1:	1 x SATA 6 Gb/s, 22 pini, mamă
Conector 2:	1 x conector de alimentare mamă cu 4 pini pentru dischetă 1 x SATA 6 Gb/s, 7 pini mamă

Technical characteristics

Data transfer rate:	6 Gb/s
Voltage:	5 V 12 V

Physical characteristics

Conductor gauge:	30 AWG data line 22 AWG power line
Lungime:	30 cm