


Delock Slot bracket 1 x 19 pin USB 3.1 pin header female internal > 2 x USB Type-C™ female external Low Profile

Description

This slot bracket by Delock expands the PC by two external USB Type-C™ ports and can be mounted in Mini PCs due to the low profile bracket. The cable of the slot bracket can be connected internally to the motherboard with a 19 pin USB 3.1 pin header. Thus the internal connection will be lead outside, in order to connect devices with USB Type-C™ connector to the computer.

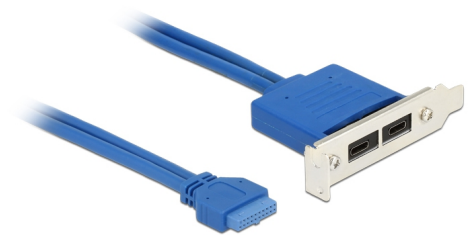

ca. 30 cm

Note

For the connection of two USB devices at once, which need more than 750 mA each, an additional power supply is necessary.

Item no. 84929

EAN: 4043619849291

Country of origin: China

Package: Zip poly bag

Specification

- Connector:
internal: 1 x 19 pin SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) pin header female
external: 2 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
- For the installation in a low profile PC
- Pitch distance: 2.00 mm
- Screw type: M3
- Cable gauge:
28 AWG data line
24 AWG power line
- Cable diameter: ca. 5.5 mm
- Data transfer rate up to:
SuperSpeed USB 10 Gbps,
SuperSpeed USB 5 Gbps,
Hi-Speed 480 Mbps,
Full-Speed 12 Mbps,
Low-Speed 1.5 Mbps
- Backward compatible to 19 pin USB 3.0 pin header with a data transfer rate of up to 5

Gbps

- Power output: max. 1.5 A
- Voltage: 5 V
- Slot bracket: low profile
- Cable colour: blue
- Cable length incl. connector: ca. 30 cm

System requirements

- PC with a free low profile slot
- Mainboard with a free 19 pin USB 3.1 pin header male

Package content

- Slot bracket

Images



Interface

External:	2 x USB Type-C™ female
Internal:	1 x 19 pin USB 5 Gbps pin header female

Technical characteristics

Data transfer rate:	SuperSpeed USB 10 Gbps
---------------------	------------------------

Physical characteristics

Pitch distance:	2.00 mm
Cable colour:	blue
Cable length:	30 cm
Conductor gauge:	28 AWG data line 24 AWG power line
Screw type:	M3
Slot bracket:	Low Profile