


Delock Cable SATA 6 Gb/s 7 pin receptacle + 2 pin power female > SATA 22 pin receptacle straight (5 V) metal 20 cm

Description

This cable by Delock enables the connection of a device with 22 pin SATA interface over a free SATA 7 pin port and a free 2 pin power interface of the motherboard, as available e.g. on the Banana Pi. The metal clips on the SATA receptacles ensure that the cable reliably clicks into place.

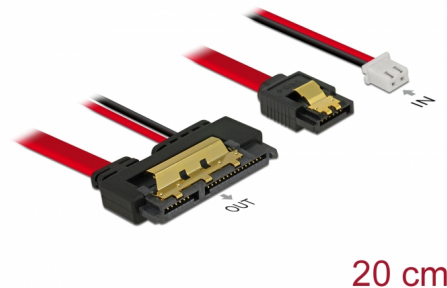

Item no. 85240

EAN: 4043619852406

Country of origin: China

Package: Zip poly bag

Specification

- Connectors:
1 x SATA 6 Gb/s 7 pin receptacle + 1 x 2 pin power female >
1 x SATA 6 Gb/s 22 pin receptacle straight
- Pitch: 2.50 mm
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Voltage: 5 V
- Cable gauge:
26 AWG data line
20 AWG power line
- Applicable e.g. with Banana Pi
- Length incl. connectors: ca. 20 cm

System requirements


- A free SATA 7 pin interface

- One free 2 pin power plug

Package content

- SATA cable

Images



General

| | |
|----------------|-------------|
| Specification: | SATA 6 Gb/s |
|----------------|-------------|

Interface

| | |
|--------------|-----------------------------------|
| Connector 1: | 1 x SATA 6 Gb/s 7 pin receptacle |
| Connector 2: | 1 x 2 pin power female |
| connector 3: | 1 x SATA 6 Gb/s 22 pin receptacle |

Technical characteristics

| | |
|---------------------|--------|
| Data transfer rate: | 6 Gb/s |
| Voltage: | 5 V |

Physical characteristics

| | |
|------------------|---------------------------------------|
| Pitch distance: | 2.50 mm |
| Conductor gauge: | 26 AWG data line 20 AWG power line |
| Length: | 20 cm |