


# Delock Cable SATA 6 Gb/s 7 pin receptacle + 2 pin power female > SATA 22 pin receptacle downwards angled (5 V) metal 20 cm

## Description

This cable by Delock enables the connection of a device with 22 pin SATA interface over a free SATA 7 pin port and a free 2 pin power interface of the motherboard, as available e.g. on the Banana Pi. The metal clips on the SATA receptacles ensure that the cable reliably clicks into place.

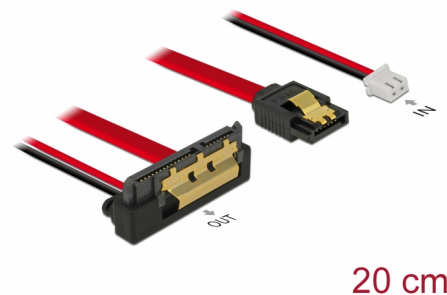

**Item no. 85241**

EAN: 4043619852413

Country of origin: China

Package: Zip poly bag

## Specification

- Connectors:  
1 x SATA 6 Gb/s 7 pin receptacle + 1 x 2 pin power female >  
1 x SATA 6 Gb/s 22 pin receptacle downwards angled
- Pitch: 2.50 mm
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Voltage: 5 V
- Cable gauge:  
26 AWG data line  
20 AWG power line
- Applicable e.g. with Banana Pi
- Length incl. connectors: ca. 20 cm

## System requirements

- A free SATA 7 pin interface

- One free 2 pin power plug


---

## Package content

- SATA cable

---

## Images



## General

|                |             |
|----------------|-------------|
| Specification: | SATA 6 Gb/s |
|----------------|-------------|

## Interface

|              |                                   |
|--------------|-----------------------------------|
| Connector 1: | 1 x SATA 6 Gb/s 7 pin receptacle  |
| Connector 2: | 1 x 2 pin power female            |
| connector 3: | 1 x SATA 6 Gb/s 22 pin receptacle |

## Technical characteristics

|                     |        |
|---------------------|--------|
| Data transfer rate: | 6 Gb/s |
| Voltage:            | 5 V    |

## Physical characteristics

|                  |                                       |
|------------------|---------------------------------------|
| Pitch distance:  | 2.50 mm                               |
| Conductor gauge: | 26 AWG data line<br>20 AWG power line |
| Length:          | 20 cm                                 |