


# Delock PoweredUSB cable male 12 V > 2 x 4 pin male 3 m for POS printers and terminals

## Description

This PoweredUSB cable by Delock can be used to connect a device with 2 x 4 pin port to a PC or hub with PoweredUSB 12 V port. It is suitable for connecting various POS devices such as printers and terminals, **e.g. by IBM or other manufacturers**. The cable is used both for data transmission and for power supply of the connected device.

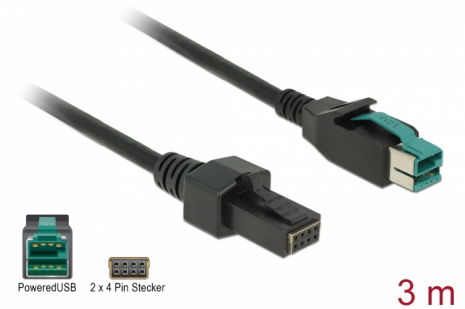

**Item no. 85484**

EAN: 4043619854844

Country of origin: China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x PoweredUSB male 12 V >
  - 1 x Male 2 x 4 pin
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge:
  - 26 AWG data line
  - 20 AWG power line
- Cable diameter: ca. 6.5 mm
- Cable double shielded
- Data transfer rate up to 480 Mbps
- Colour: black
- Length incl. connectors (L): ca. 3 m

## System requirements

- PC or hub with a free PoweredUSB 12 V female port

- Device with a free 2 x 4 pin female port


---

## Package content

- PoweredUSB cable

---

## Images

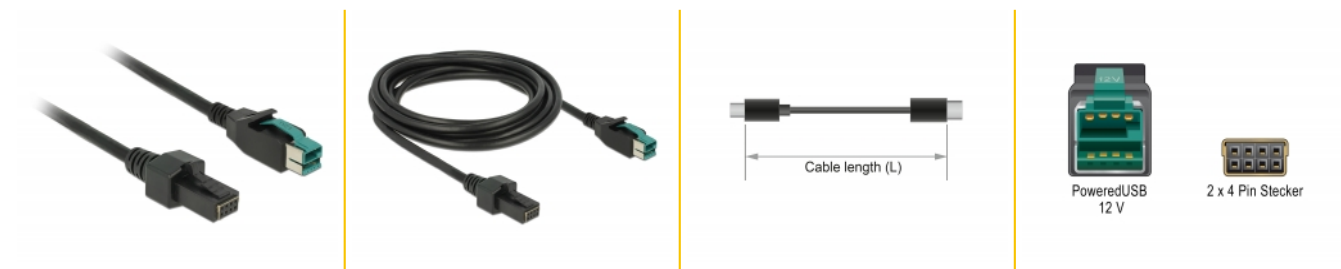

## General

Specification:	PoweredUSB
----------------	------------

## Interface

Connector 1:	1 x PoweredUSB male 12 V
Connector 2:	1 x male 2 x 4 pin

## Technical characteristics

Data transfer rate:	USB 2.0 up to 480 Mb/s
Voltage:	12 V

## Physical characteristics

Conductor gauge:	26 AWG data line 20 AWG power line
Shielding:	double
Length:	3 m
Colour:	black