


# Delock PoweredUSB cable male 12 V > DC 5.5 x 2.1 mm male 1 m for POS printers and terminals

## Description

This PoweredUSB cable by Delock can be used to supply power to a device with DC 5.5 x 2.1 mm female port via a PC or hub with PoweredUSB 12 V port.

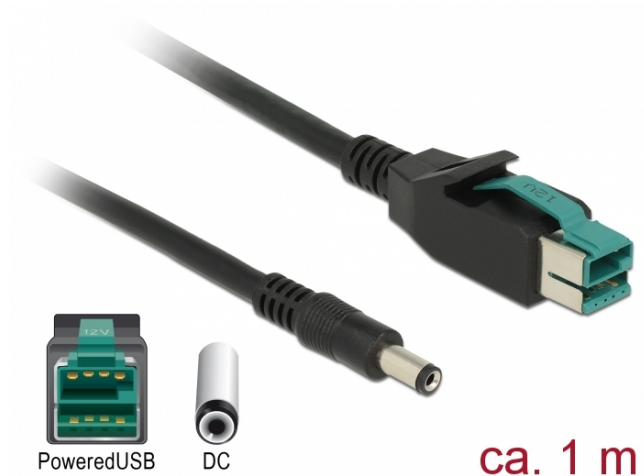

## Specification

- Connectors:  
1 x PoweredUSB male 12 V >  
1 x DC 5.5 x 2.1 mm male
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge: 24 AWG
- Cable diameter: ca. 6 mm
- Cable double shielded
- Colour: black
- Length incl. connectors (L): ca. 1 m

## System requirements

- PC or hub with a free PoweredUSB 12 V female port

## Package content

- PoweredUSB cable

## Item no. 85497


EAN: 4043619854974

Country of origin: China

Package: Poly bag



## Images

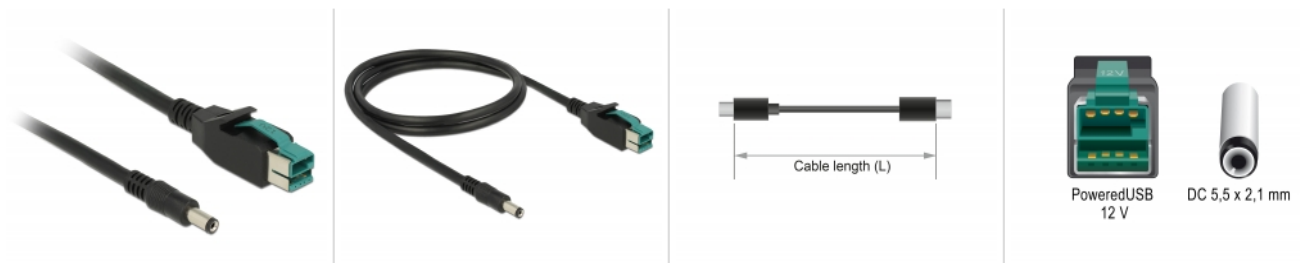

General	
Specification:	PoweredUSB
Interface	
Connector 1:	1 x PoweredUSB male 12 V
Connector 2:	1 x DC 5.5 x 2.1 mm male
Technical characteristics	
Voltage:	12 V
Physical characteristics	
Cable diameter:	6 mm
Conductor gauge:	24 AWG power line
Shielding:	double
Length:	1 m
Colour:	black