


Delock Riser Card PCI Express x1 to x16 with flexible cable 30 cm

Description

This PCI Express riser card by Delock is used to connect a PCI Express x16 card. The flexible cable allows a space-saving installation inside the computer case.

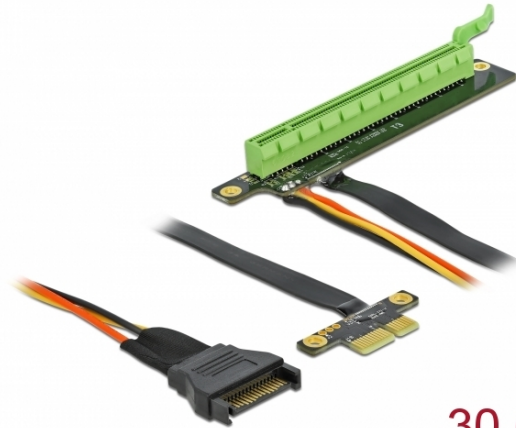

30 cm

Note

For technical reasons, only one lane is available for data transmission at the PCI Express x16 slot.

Specification

- Connectors:
1 x PCI Express x1 male +
1 x SATA 15 pin power plug >
1 x PCI Express x16 slot (1-Lane)
- Compatible to PCI Express V3.0
- Cable gauge:
30 AWG data line
18 AWG power line
- Colour: black
- OS independent, no driver installation necessary
- Cable length:
data cable ca. 30 cm
power cable ca. 15 cm
- Dimensions (LxWxH): ca. 115 x 18 x 20 mm

System requirements

- PC with one free PCI Express x1 / x4 / x8 / x16 / x32 slot
- A free SATA receptacle on the power supply

Package content

- PCIe riser card


Item no. 85762

EAN: 4043619857623

Country of origin: Taiwan, Republic of China

Package: • White Box

Images

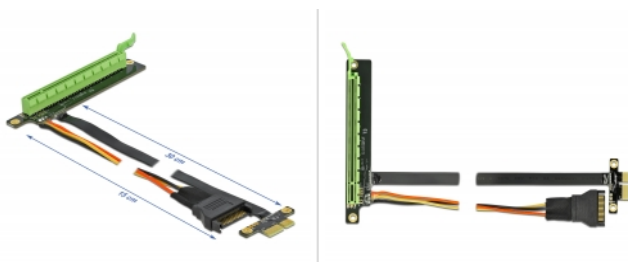

| General | |
|--------------------------|---|
| Specification: | PCI Express 3.0 |
| Style: | Flat cable |
| Interface | |
| Connector 1: | 1 x SATA 15 pin plug 1 x PCI Express x1 male |
| Connector 2: | 1 x PCI Express x16 slot |
| Physical characteristics | |
| Cable length: | 15 cm 30 cm |
| Conductor gauge: | 30 AWG data line 18 AWG power line |
| Length: | 115 mm |
| Width: | 18 mm |
| Height: | 20 mm |
| Colour: | black |