

Delock Serial Cable RS-232 D-Sub9 female to female null modem with narrow plug housing 4 m

Description

This serial cable by Delock is a **full handshaking null modem cable** for printers, measuring instruments, converters, RS-232 hubs, patch panels etc. With this cable, two serial RS-232 devices can be connected to each other for data exchange.

Mini D-Sub9 connector

These cables fit any RS-232 port, as the mini D-Sub9 connectors (44 x 33.3 x 15 mm) are small and compact. In this way, RS-232 connections can be used directly adjacent to each other.



4 m

Specification

- Connectors:
 - 1 x serial D-Sub9 female with screws >
 - 1 x serial D-Sub9 female with screws
- Cable gauge: 28 AWG
- Full handshaking cable
- Pin assignment: 1+6 - 4, 2 - 3, 3 - 2, 4 - 1+6, 5 - 5, 7 - 8, 8 - 7, shielded
- Colour: black
- Insulator: PVC
- Screw type: #4-40 UNC
- Cable diameter: ca. 5 mm
- Cable length incl. connectors: ca. 4 m

Item no. 86620

EAN: 4043619866205

Country of origin: China

Package: Zip poly bag


System requirements

- A free D-Sub9 male port

Package content

- Cable

Images

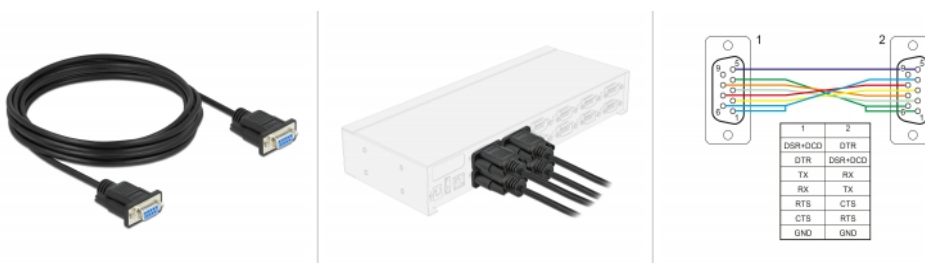

| General | |
|-------------------------------|--|
| Specification: | RS-232 (EIA / TIA) |
| Style: | Null Modem Mini Sub-D9 |
| Interface | |
| Connector 1: | 1 x serial D-Sub 9 female with screws |
| Connector 2: | 1 x serial Sub-D 9 female with screws |
| Technical characteristics | |
| Data transfer rate: | up to 921.6 Kbps |
| Signal transmission: | TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND |
| Physical characteristics | |
| Cable type: | AWM Style 2464 28 AWG 80 °C 300 V VW-1 |
| Cable diameter: | 5 mm |
| Cable length incl. connector: | 4 m |
| Connector finishing: | gold-plated |
| Conductor material: | Copper tinned |
| Conductor gauge: | 28 AWG |
| Screw type: | #4-40 UNC |
| Shielding: | Aluminum foil |
| Colour: | black |
| Cable jacket material: | PVC |
| Safety of Flammability: | VW-1 |