

Delock Docking Station Dual USB Type-C™ with HDMI / USB 3.2 / SD / PD 3.0

Description

This docking station by Delock can be connected to a MacBook with two adjacent Thunderbolt™ 3 ports, e.g. the MacBook Pro. It is also possible to insert one of the two USB-C™ plugs into the housing, so that the docking station can also be connected to other devices such as a smartphone, tablet or laptop. One monitor with **4K 30 Hz** can be operated at the HDMI output port. One built-in **USB Type-C™ port** and two **USB Type-A ports** allows the use of peripherals.

USB Type-C™ pass-through

One of the two USB-C™ female ports is coupled to the insertable USB-C™ plug. This means that when it is extended (when used with a MacBook), the **USB-C™ female port (pass-through)** provides the full function of the USB-C™ interface. This port can transmit data at **10 Gbps**, charge the device (PD 3.0), or connect another monitor with a resolution of up to **4K 60 Hz**. In addition, as with **MST**, two additional monitors can be operated independently of each other (extended display).

If the docking station is only operated with one USB Type-C™ port, the USB-C™ (pass-through) female port has no function.

Integrated Card Reader


In addition, the docking station with integrated card reader expands mobile devices by an **SD** and a **Micro SD** slot via the USB Type-C™ connection.

USB Power Delivery (USB PD 3.0) support up to 100 watt

The docking station has a USB Type-C™ Power Delivery port to connect the power supply of the laptop or tablet to charge it. The docking station can also be used without a power supply.

Small sturdy helper

Due to its small dimensions and its **sturdy housing**, this Delock docking station is particularly suitable for travelling. It can simply be packed into the bag together with the laptop and used as needed.

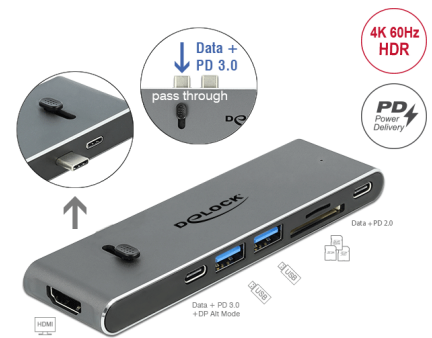

Item no. 87752

EAN: 4043619877522

Country of origin: China

Package: Retail Box

Note

Only one additional external monitor can be connected to MacBook devices with M1 chipset.

Specification

- Connectors:
 - 2 x USB Type-C™ male
 - 1 x HDMI-A female
 - 2 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female PD 2.0
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female PD 3.0 (pass-through)
 - 1 x SD slot
 - 1 x Micro SD slot
 - Resolution:
 - HDMI up to 3840 x 2160 @ 30 Hz
 - USB-C™ DP Alt Mode up to 3840 x 2160 @ 60 Hz (pass-through)
(depending on the system and the connected hardware)
 - Transmission of audio and video signals
 - Supports HDR
 - Supports HDCP 1.4 and 2.2
 - USB Power Delivery (PD)
 - Slide switch for USB-C™ male
 - 1 x LED indicator
 - Metal housing
 - Colour: grey
 - Dimensions (LxWxH): ca. 125 x 35 x 12 mm
-

System requirements

- Android 8.0 or above
- Chrome OS 76.0 or above
- iPad Pro (2018)
- Linux Kernel 4.3 or above
- Mac OS 10.15.1 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- MacBook Pro with two adjacent Thunderbolt™ 3 ports
- Device with a free USB Type-C™ port and DisplayPort alternate mode or with a free Thunderbolt™ 3 port

Package content

- Docking station
- User manual

Images



Interface

Connector 1:	2 x USB Type-C™ male
Connector 2:	1 x HDMI-A female
connector 3:	2 x USB 5 Gbps Type-A female
connector 4:	1 x USB 5 Gbps USB Type-C™ female PD 2.0

Technical characteristics

Maximum screen resolution:	3840 x 2160 @ 60 Hz
----------------------------	---------------------

Physical characteristics

Housing material:	metal
Colour:	grey