


# Delock Optical fiber quick connector SC Simplex plug UPC field-assembly

## Description

This quick connector by Delock enables a fast and secure optical fiber connection and is ideal for FTTH, CATV applications. The SC connector cables can be quickly assembled without splicing.

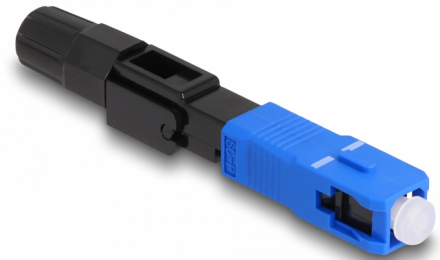

**Item no. 87990**

EAN: 4043619879908

Country of origin: China

Package: Zip poly bag

## Specification

- Optical fiber quick connector for FTTH applications
- For single-mode UPC fiber
- For cable diameter from 2.0 - 3.0 mm
- Insertion loss < 0.5 dB
- Return loss > 50 - 60 dB
- Ceramic sleeve
- Operating temperature: -40 °C ~ 85 °C
- Material: plastic
- Colour: blue / black
- Dimensions (LxWxH): ca. 60.0 x 8.9 x 7.4 mm

## Package content

- Optical fiber quick connector
- User manual

## Images



## Technical characteristics

Operating temperature:	-40 °C ~ 85 °C
------------------------	----------------

## Physical characteristics

Material:	Plastic
Length:	60.0 mm
Width:	8.9 mm
Height:	7.4 mm
Colour:	blue / black
Cable diameter:	2.0 - 3.0 mm