

Delock USB Type-C™ Docking Station 4K - Dual HDMI MST / USB / Gigabit LAN / PD 3.0 85 W

Description

This docking station by Delock can be connected to a computer with a **USB-C™ DP Alt Mode or Thunderbolt™ 3 or Thunderbolt™ 4** port and provides a variety of interfaces. Two monitors can be operated simultaneously at the **HDMI** output ports. **Three built-in USB Type-A and one USB-C™** port allow the use of peripherals.

Multi-Stream Transport (MST)


The product is a Multi-Stream Transport (MST) hub and supports the **extended desktop configuration** of DisplayPort. In Windows, the connected monitors are controlled individually, and can be combined into one large display.

Integrated 10/100/1000 Mbps LAN interface

In addition, the docking station with integrated **RJ45 Gigabit LAN** connection expands a PC or laptop by a network interface.

USB Power Delivery (USB PD 3.0) support up to 85 watt

The docking station has a **USB Type-C™ Power Delivery port**. If this port is connected to the power supply of the laptop or tablet, the host device is charged with up to 85 watts during operation.

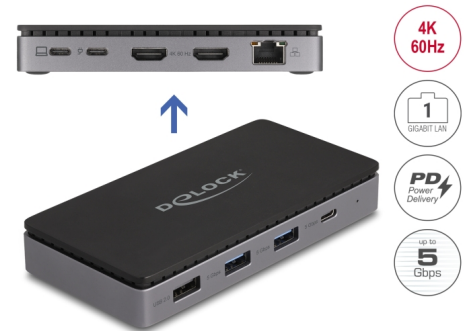

Item no. 88271

EAN: 4043619882717

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x USB Type-C™ female
 - 2 x HDMI-A female
 - 2 x USB 5 Gbps Type-A female
 - 1 x USB 5 Gbps USB Type-C™ female
 - 1 x USB 2.0 Type-A female
 - 1 x Gigabit LAN 10/100/1000 Mbps RJ45 jack
 - 1 x USB Type-C™ PD female (power supply)
- Maximum resolution (depending on the system and the connected hardware):
 - Single display: up to 3840 x 2160 @ 60 Hz
 - Dual display: up to 3840 x 2160 @ 60 Hz

- Functions: Mirrored or Extended (Windows only)
 - Transmission of audio and video signals
 - Supports HDCP 1.4 and 2.2
 - Supports HDR
 - Input power PD port: 100 W, 15 W are used for the docking station
 - Output power for host: max. 85 W
 - Housing material: metal / plastic
 - LED indicator
 - Colour: black
 - Dimensions (LxWxH): ca. 125 x 62 x 19 mm
-

System requirements

- Android 13.0 or above
 - Chrome OS
 - Linux Kernel 5.15 or above
 - Mac OS 13.1 or above
 - Windows 10/10-64/11
 - iPad Air (4th Generation) or above
 - iPad Pro (3rd Generation) or above
 - Surface Pro 7
 - Device with a free USB Type-C™ port and DisplayPort alternate mode or with a free Thunderbolt™ 3 or Thunderbolt™ 4 port
-

Package content

- USB-C™ docking station
- Cable USB-C™ male to USB-C™ male, length ca. 1 m
- User manual

Images



General

Supported operating system:	Chrome OS Surface Pro 7 Windows 10 32-Bit Windows 10 64-Bit iPad Pro (3rd Generation) or above iPad Air (4th Generation) or above Windows 11 Linux Kernel 5.15 or above Mac OS 13.1 or above Android 13.0 or above
-----------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Technical characteristics

Maximum screen resolution:	3840 x 2160 @ 60 Hz
----------------------------	---------------------

Physical characteristics

Cable length:	20 cm (without connector)
Length:	125 mm
Width:	62 mm
Height:	19 mm
Colour:	grey / black