


# Delock PCI Card > 8 x Serial RS-422/485 High Speed 921K 600 W Surge

## Description

The Delock PCI card expands your system by eight High Speed RS-422/485 ports. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area.

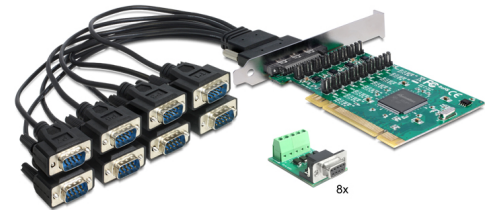

**Item no. 89332**

EAN: 4043619893324

Country of origin: Taiwan,  
Republic of China

Package: Box

## Specification

- Chipset: Systembase SB16C1058PCI
- Connector:
  - external:
    - 1 x VHDCI 68 Pin female
    - connecting cable: VHDCI 68 pin male > 8 x Serial RS-422/485
    - D-Sub 9 pin male
  - internal:
    - 1 x PCI
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)

- 15 kV ESD protection for all signals
- Additional external surge protection 600 W for RS-422/485
- Bus: universal 32/64 Bit 3.3/5 V PCI version 2.1, 2.2, 2.3 and PCI-X
- I/O address and IRQ assigned by the system

---

## System requirements

- Windows XP/XP-64/Vista/Vista-64/7/7-64, Linux ex Kernel 2.6
- PC with a free PCI slot

---

## Package content

- PCI card
- Low profile bracket
- 1 serial connecting cable (ca. 30 cm)
- 8 x 5 pin Terminal Block to serial D-Sub 9 pin with integrated surge protection
- Driver CD
- User manual

---

## Images

