


## Delock PCI Express kartica > 1 x 10 Gigabit LAN NBASE-T RJ45

### Opis

Ova Delock PCI Express kartica pruža mrežni priključak s brzinom prijenosa do 10 Gbps pomoću konvencionalnih bakrenih kabela kat. 6 ili kat. 6A. Uz NBASE-T tehnologiju, dostupne su dodatne brzine od 2,5 Gbps i 5 Gbps. To omogućuje brzine prijenosa veće od 1 Gbps, kad veza od 10 Gbps nije moguća uz postojeći kabel.

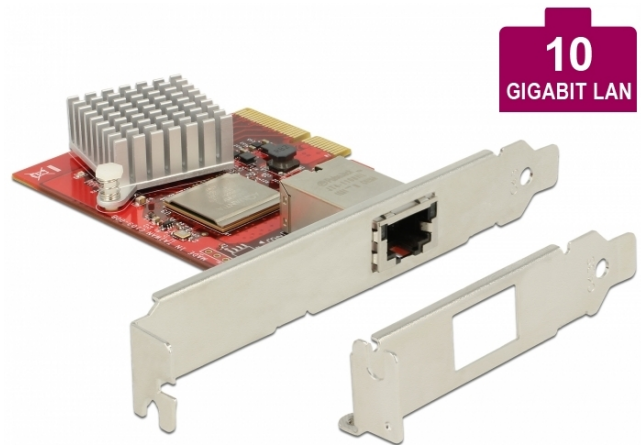

### Tehnički podaci

- Priključak:  
vanjski: 1 x 10 Gigabit LAN RJ45 ženski  
unutarnji: 1 x PCI Express x4, V2.0
- Skup čipova: Tehuti TN4010
- Brzina prijenosa podataka:  
Fast Ethernet do 100 Mbps  
Gigabit Ethernet do 1 Gbps  
NBASE-T (nacr) s brzinom do 2,5 Gbps i 5 Gbps  
10 Gigabit Ethernet do 10 Gbps  
PCI Express x4 do 16 Gbps
- Podržava 16k Jumbo okvire
- Podržava IEEE 802.1Q virtualni LAN (VLAN)
- Podržava IEEE 802.3ad pridruživanje veza

### Preduvjeti sustava

- Windows Server-2008 R2/Server-2012/Server-2012 R2/7/7-64/8.1/8.1-64/10/10-64,  
Linux ex Kernel 2.6.24
- Računalo s jednim slobodnim PCI Express x4 / x8 / x16 / x32 utorom

### Sadržaj pakiranja

- PCI Express kartica
- Nosač niskog profila
- CD s upravljačkim programom
- Korisnički priručnik

### Predmet br. 89456


EAN: 4043619894567

Zemlja podrijetla: Taiwan, Republic of China

Pakiranje: Retail Box



### Slike

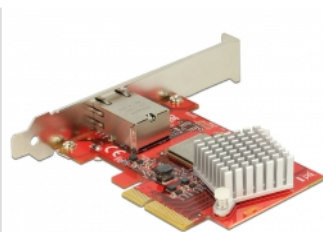

**General**

Supported operating system:	Linux Kernel 2.6.24
	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8 32-bit
	Windows 8 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Windows Server 2008 R2
	Windows Server 2012 R2
	Windows Server 2012

**Interface**

External:	1 x 10 Gigabit LAN RJ45 jack
Internal:	1 x PCI Express x4, V2.0

**Technical characteristics**

Chipset:	Tehuti TN4010
Data transfer rate:	Fast Ethernet up to 100 Mbps
	Gigabit Ethernet up to 1 Gbps
	NBASE-T (Draft) with up to 2,5 Gbps and 5 Gbps
	Gigabit Ethernet up to 10 Gbps

**Physical characteristics**

Slot bracket:	low profile
	standard