


Delock PCI Express x4 Card U.2 NVMe to 1 x internal SFF-8643 + 1 x internal SFF-8639 – Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by one SFF-8643 and one SFF-8639 interface. It can be connected e.g. one SSD with U.2 interface by using an optional cable. Only one port can work, not both simultaneously. The card transmits PCI Express signals using the NVMe protocol.

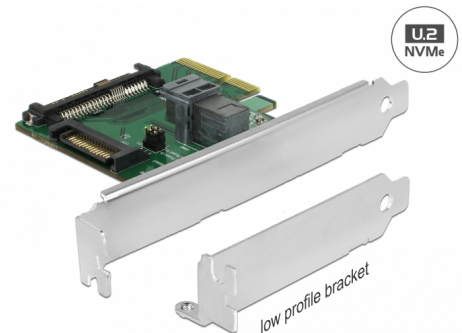

Item no. 89922

EAN: 4043619899227

Country of origin: Taiwan,
Republic of China

Package: Box

Specification

- Connectors:
 - 1 x 36 pin SFF-8643 female
 - 1 x U.2 SFF-8639 male
 - 1 x SATA 15 pin plug
 - 1 x PCI Express x4, V3.0
- Data transfer rate up to 24 Gbps
- 1 x LED for attendance
- 2 x jumper to set the power supply via PCIe or SATA interface
- Bootable, from UEFI version 2.3.1
- Supports NVM Express (NVMe) 1.2

System requirements


- Linux Kernel 4.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11

- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Mounting material
- User manual

Images

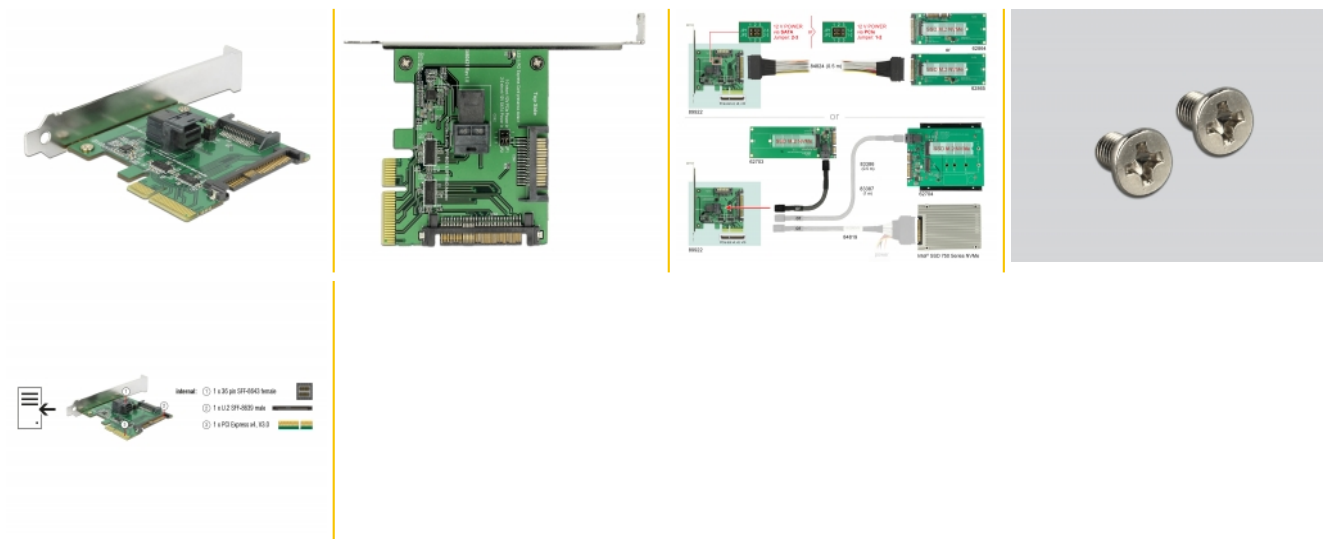

General

Function:	Bootable, ex UEFI 2.3.1
Supported operating system:	Linux Kernel 4.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

Interface

Internal:	1 x PCI Express x4, V3.0 1 x U.2 SFF-8639 male 1 x 36 pin SFF-8643 female 1 x SATA 15 pin plug
-----------	---

Technical characteristics

Data transfer rate:	up to 24 Gbps
Jumper:	2 x